



+86-191 2822 1262



info@otterdtf.com



www.otterdtf.com



VERSION: CTG-DTF2025-04-19



# OTTER DTF SYSTEM


Print, Cure, Wow  
with Otter DTF System!

DTF Printer / Shaker / Oven Dryer / Purifier  
Powder/ Film / Ink

UV DTF Printer / Consumables

Heat Press Machines

www.otterdtf.com

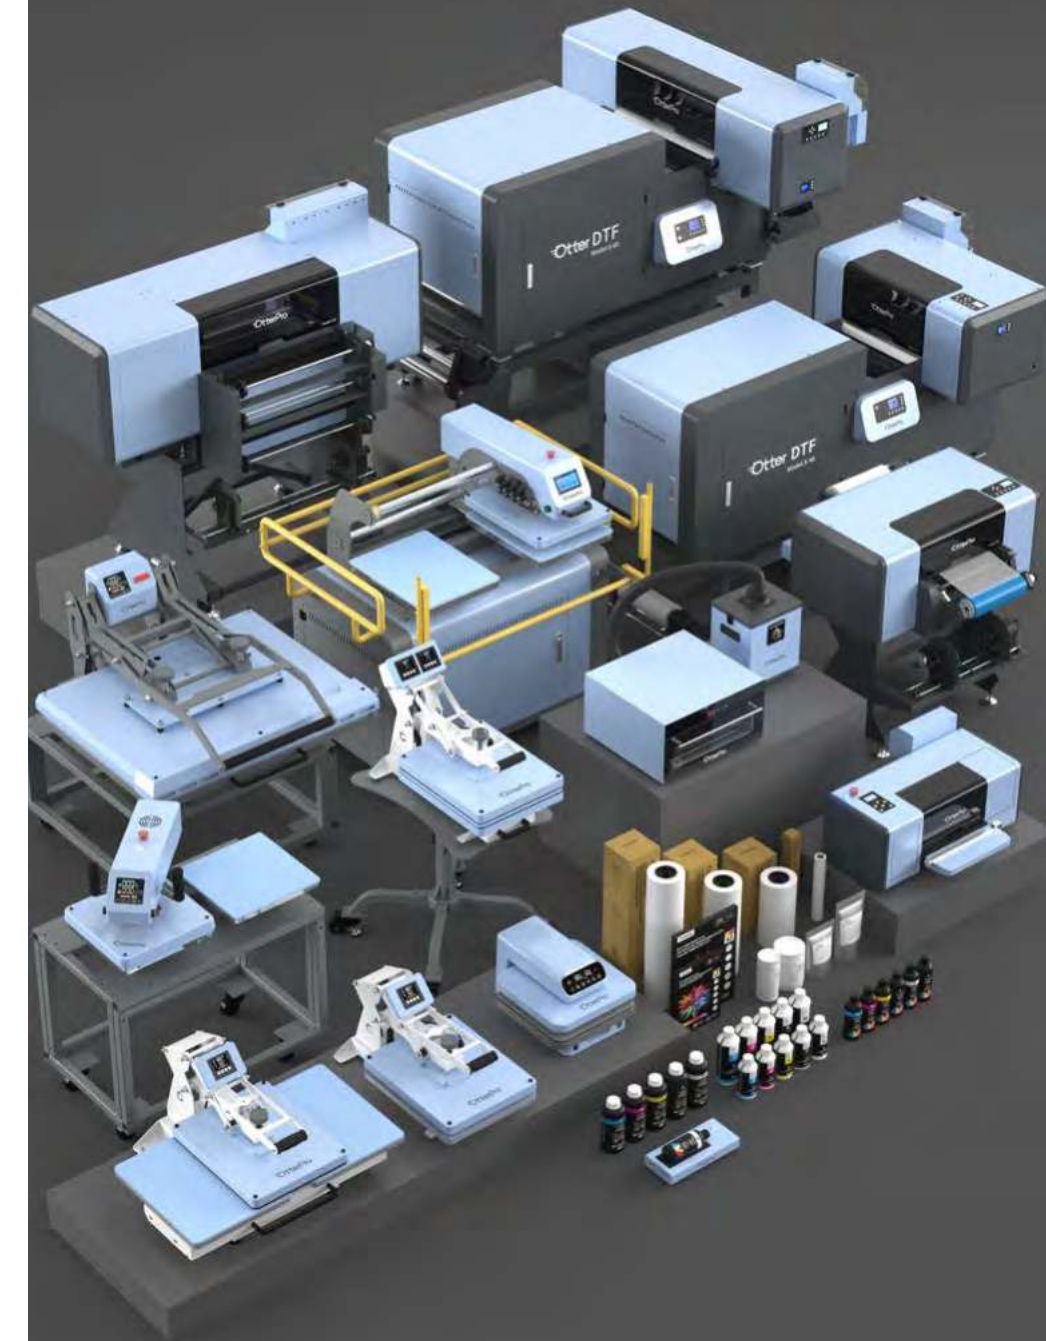



Elevate your business with OtterPro's advanced DTF printing system solutions, including DTF printers, UV DTF printers, and many other DTF printer series featuring 3D embroidery, foil stamping effects. Our tailor-made "Start to Finish" approach empowers makers, retailers, and manufacturers to enhance efficiency and innovation.

With cutting-edge technology, exceptional quality, and a focus on environmental sustainability, we're committed to boosting your productivity and competitiveness. Partner with OtterPro and transform your business into a beacon of success and efficiency.




## Local Services

To ensure prompt and seamless support for OtterPro DTF printer users worldwide, we've established multiple OtterPro DTF Printer local service stations across the United States, Mexico, Panama, Europe and Thailand. Our comprehensive one-stop service center covers everything from purchasing and installing DTF printers to after-sales support, training, maintenance, repairs, and more. And we're still working on establishing OtterPro DTF service stations globally.

Besides the local service stations, you can also find OtterPro DTF products in Canada, Saudi Arabia, Dubai, and other South American countries. If you need further assistance, please feel free to contact us!




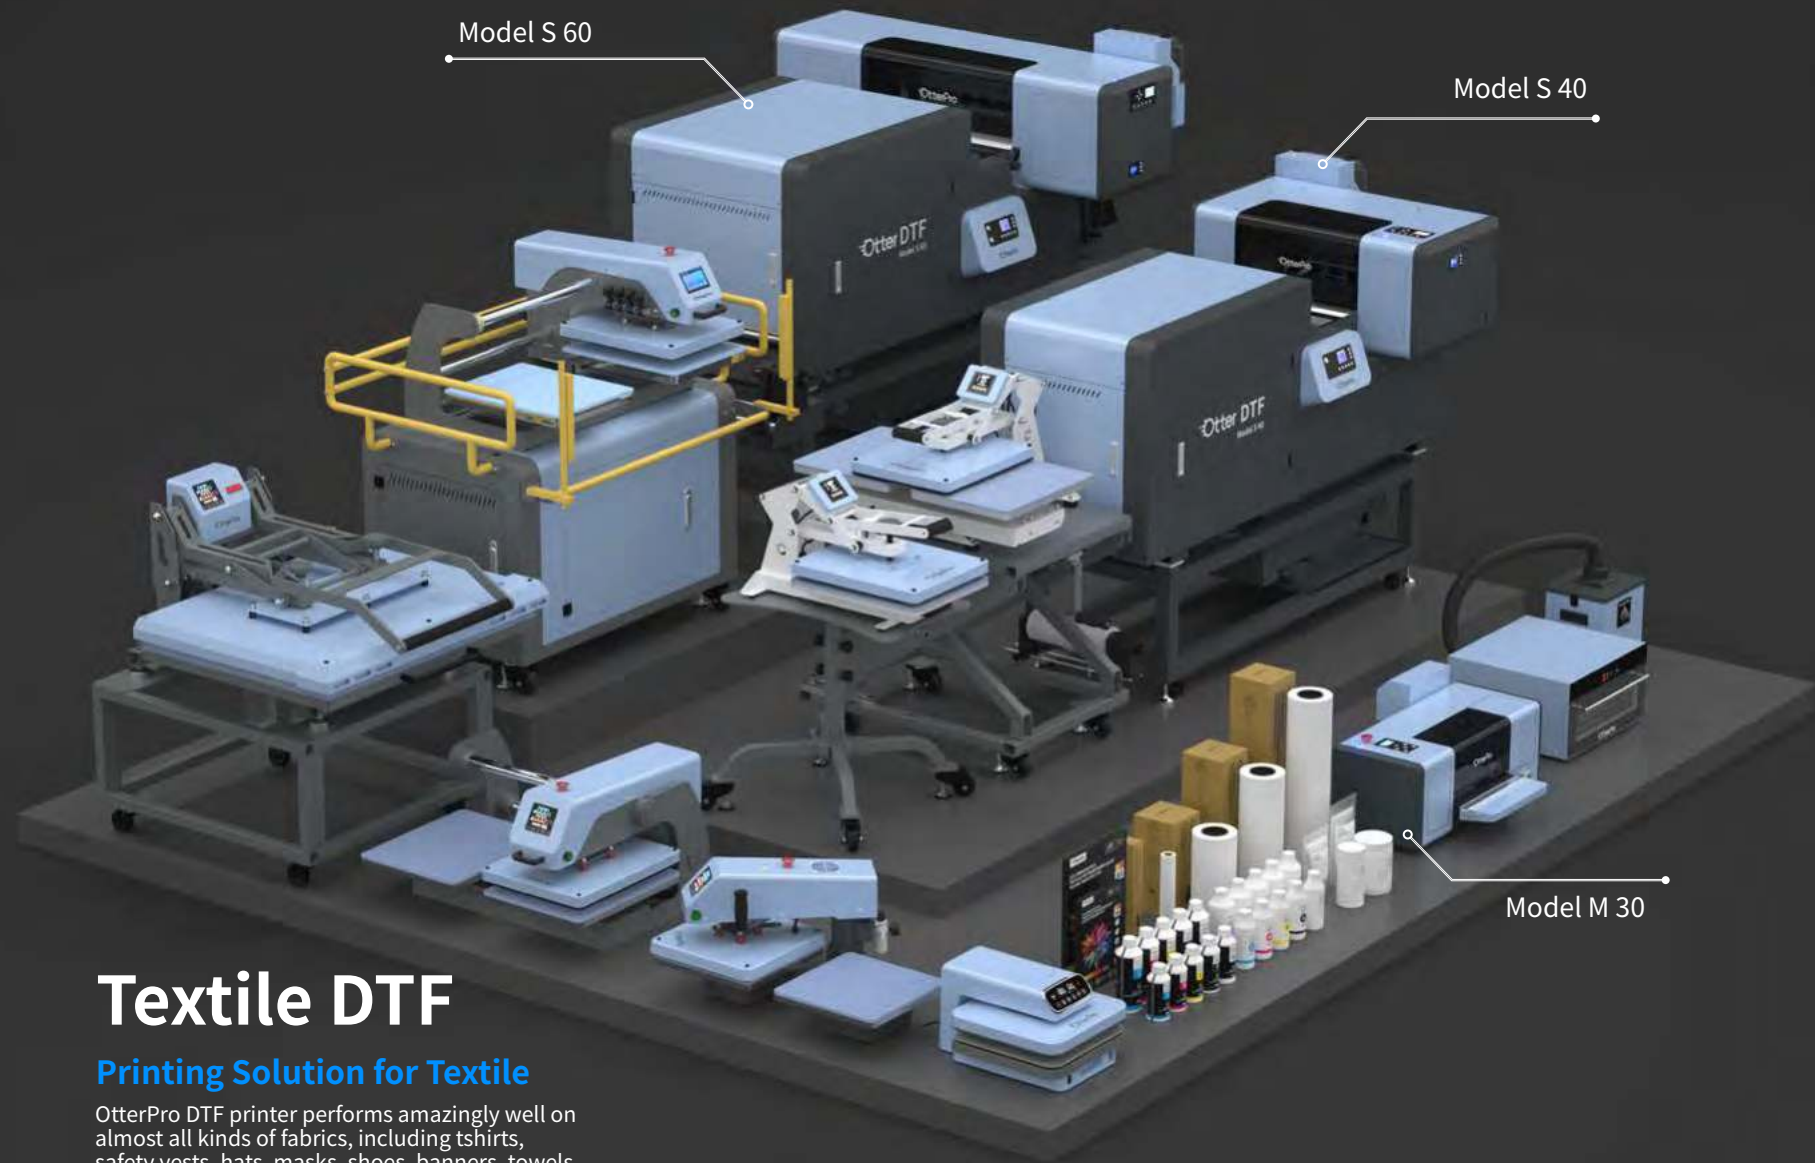

# Textile DTF

## Printing Solution for Textile

OtterPro DTF printer performs amazingly well on almost all kinds of fabrics, including tshirts, safety vests, hats, masks, shoes, banners, towels, aprons, bags, slippers, PU notebooks, coasters and more.

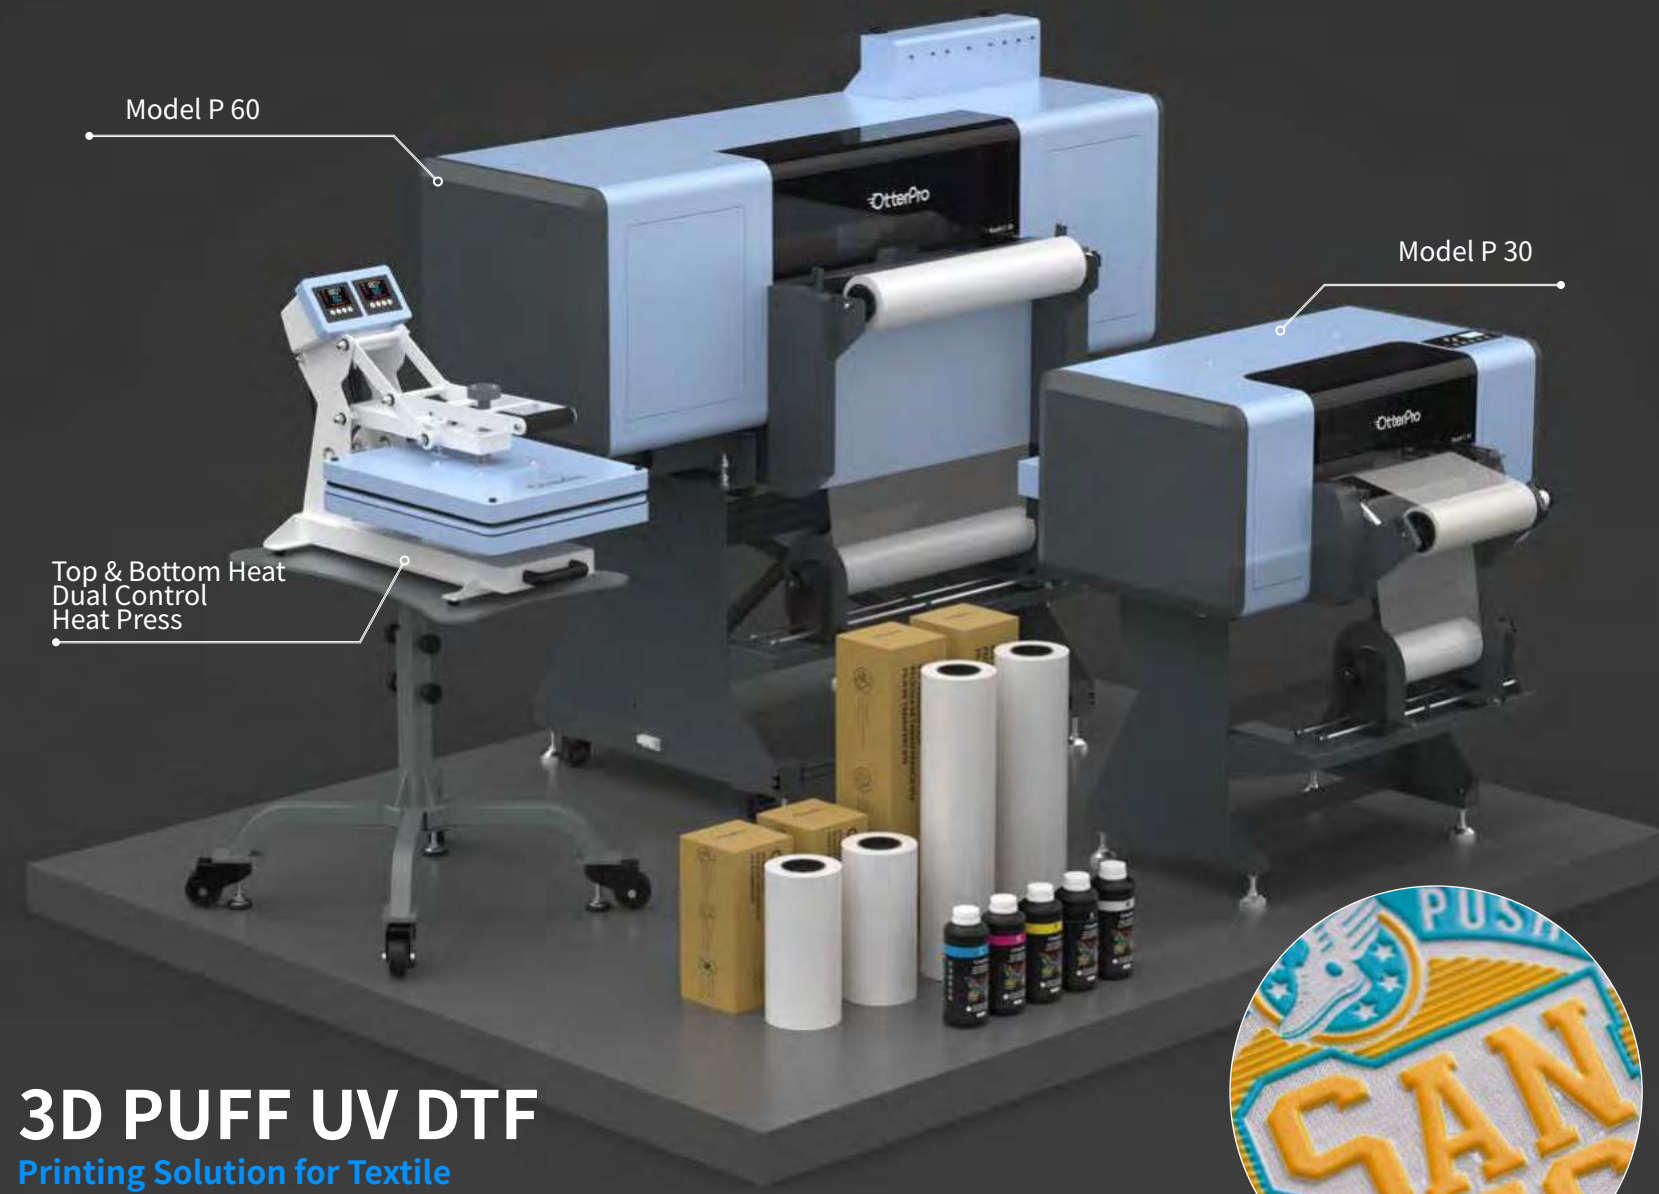

# 3D PUFF UV DTF

## Printing Solution for Textile

Achieve stunning 3D embroidery effects, raised puff designs, and silicone-like texture—all with one 3D Puff UV DTF printer! Elevate your garment business with realistic, eye-catching designs effortlessly.



Model C 60

Model C 30

## UV DTF

Printing Solution for Hard Glossy Substrates

OtterPro UV DTF Printer produces UV stickers that can be applied on almost hard, smooth, and even curved, cylindrical objects.

Model C 60 Pro

## Metallic Foil UV DTF

Printing Solution for Metallic Foil & UV DTF

OtterPro Metallic Foil UV DTF Printer combines foil stamping film to produce eye-catching and high gloss designs with golden or silver effect on the sticker, perfect for adding a touch of elegance to packaging, gifts and products.







## TEXTILE DTF PRINTING





# Model P 60 3D PUFF UV DTF Printer

Model P 60 is an industrial-level 3D PUFF UV DTF printer with a maximum print width of 60cm (23.6 inches). Equipped with 3 Epson i1600-E1 printheads, specifically designed for industrial-grade printing, it delivers exceptional performance for handling larger sizes and high-volume UV DTF printing tasks. Elevate your textile products with three stunning effects: 3D embroidery, raised puff designs, and silicone-like textures. Take your garment business to the next level!



**Epson i1600-E1**  
3 PCS




**Print Width**  
0-620 mm / 0-24.4 in MAX



**Auto System**  
White ink stirring  
Suction system  
Automatic cleaning  
Adjustable heating rollers



**Alert System**  
Low ink alerts  
Film-out detection

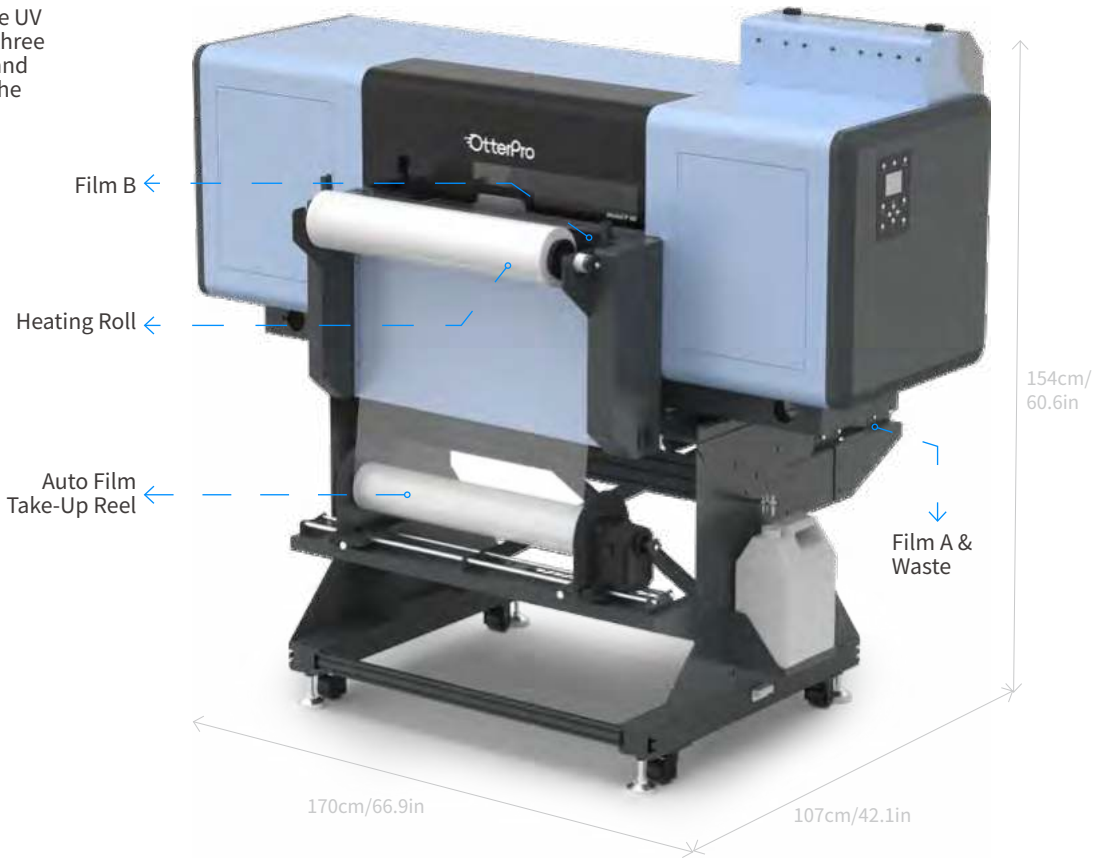

## All-in-One UV DTF System

This automated machine handles printing, lamination, waste film take-up, and puff effect, making it a cost-effective and efficient way to kickstart your business.

Model P 60 Specifications

Model No.	MODEL P60LB	Nozzle Resolution	300npi 600npi
Printhead	EPSON i1600 E1 x3	Print Speed	960*900dpi (6pass) Print Speed: 3.5-5.0m <sup>2</sup> /H 960*1200dpi (8pass) Print Speed: 2.5-3.5m <sup>2</sup> /H
Voltage	110V/220V±10% 50-60Hz	Print Mode	Uni-direction / Bi-direction
Power	330W 5A-10A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	Auto white ink stirring
Printer Software	OtterPro C 60 UV DTF	Printhead Maintenance	Automatic cleaning, ink scraping, moisturizing
Design Software	OtterPro RIP	Heating System	Adjustable heating rollers
Language Options (Software)	Chinese/English/French/German/Italian/Polish/Portuguese/Spanish	Connection Method	Gigabit Ethernet Port (PC must have Gigabit Ethernet Card)
Ink Type	UV DTF Ink	Inspection System	Low ink alerts / Film-out detection
Ink Color	H1: W+W+W+W H2: W+W+W+W H3: K+C+M+Y	System Requirements	Window 7 or above (macOS system is not supported)
Printing Method	A complete white ink, color, varnish hierarchical order printing	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Print Thickness	0-3 mm / 0-0.078 in	Printer Specification	170 x 107 x 154 cm / 66.9 x 42.1 x 60.6 in 280kg / 617lb
Print Width	0-620 mm / 0-24.4 in	Package Dimension	148 x 220 x 110 cm / 58.2 x 86.6 x 43.3 in 350kg / 771lb

NOTE:  
The UV DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.



### 3D Relief Effect

Combine 3D PUFF UV DTF ink to effortlessly create raised, tactile designs on fabric with a soft, textured finish.




### Smart Auto System

Features automatic cleaning, self-maintenance, low ink alerts, and film-out detection.



### Mute Guide Rail

Mute Guide Rail Equipped with industry-leading guide rails, this printer ensures high precision and stable performance with minimal noise.

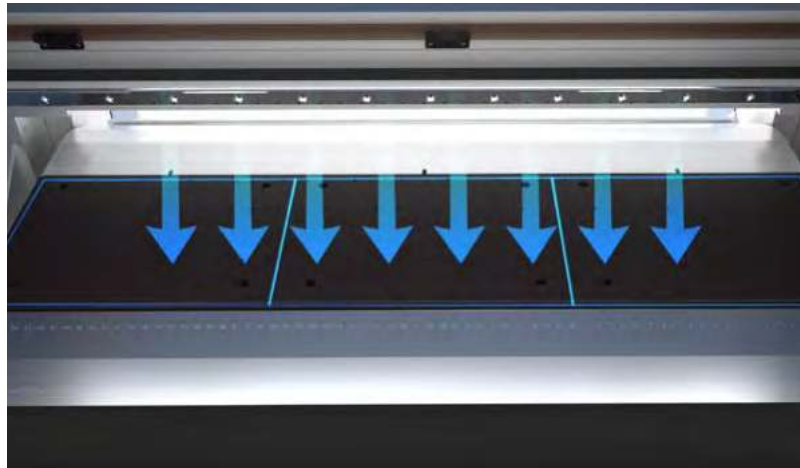

### Three-stage Vacuum Suction Platform

The 3-stage adjustable vacuum suction platform holds films securely in place, ensuring smooth, flawless printing every time, while also preventing printhead scratches from film contact.




### Adjustable Heating Rollers

Ensuring precise and uniform heat distribution to achieve a bubble-free laminating effect.




### Leadshine Stepper Motor

The advanced industrial-quality motor ensures smooth, precise and stable motion for your projects.

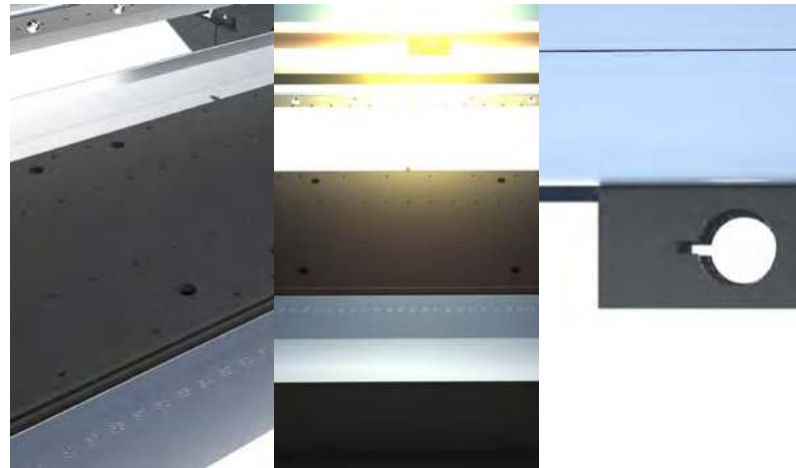

### Premium Construction Features

Corrosion-resistant treated surface and print platform for enhanced durability; integrated LED lights for illumination; the base frame features designed cutouts for convenient machine relocation.

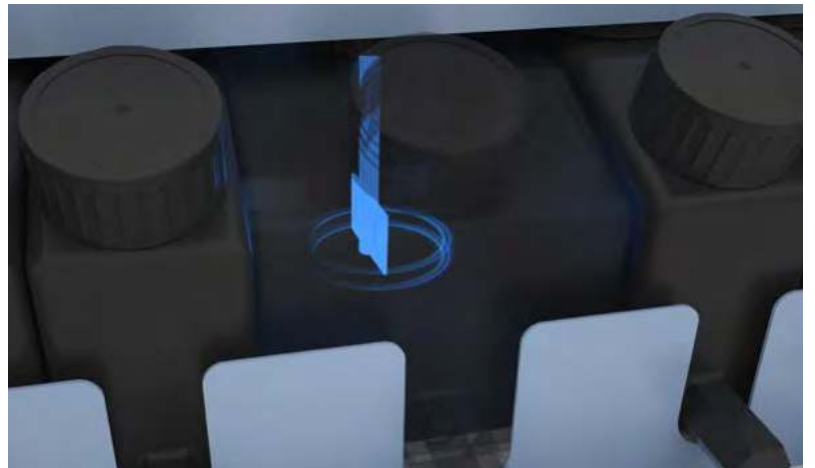

### Adjustable White Ink Auto Stirring

Prevent white ink precipitation, minimize clogging risks, and extend the lifespan of your UV DTF printer.

# Model P 30 3D PUFF UV DTF Printer


The Model P 30 is a compact 3D Puff UV DTF printer with a 30cm (11.8 inches) maximum print width. Featuring Epson i3200-U1 printheads, it delivers sharp, high-quality 3D textures—all in one powerful machine that handles printing and lamination.



Epson i3200-U1 HD  
1 PCS




Print Width  
0-300mm/11.8in Max



Auto System  
White ink circulation system  
Suction system  
Automatic cleaning  
Adjustable heating rollers



Alert System  
Low ink alerts  
Waste ink alerts

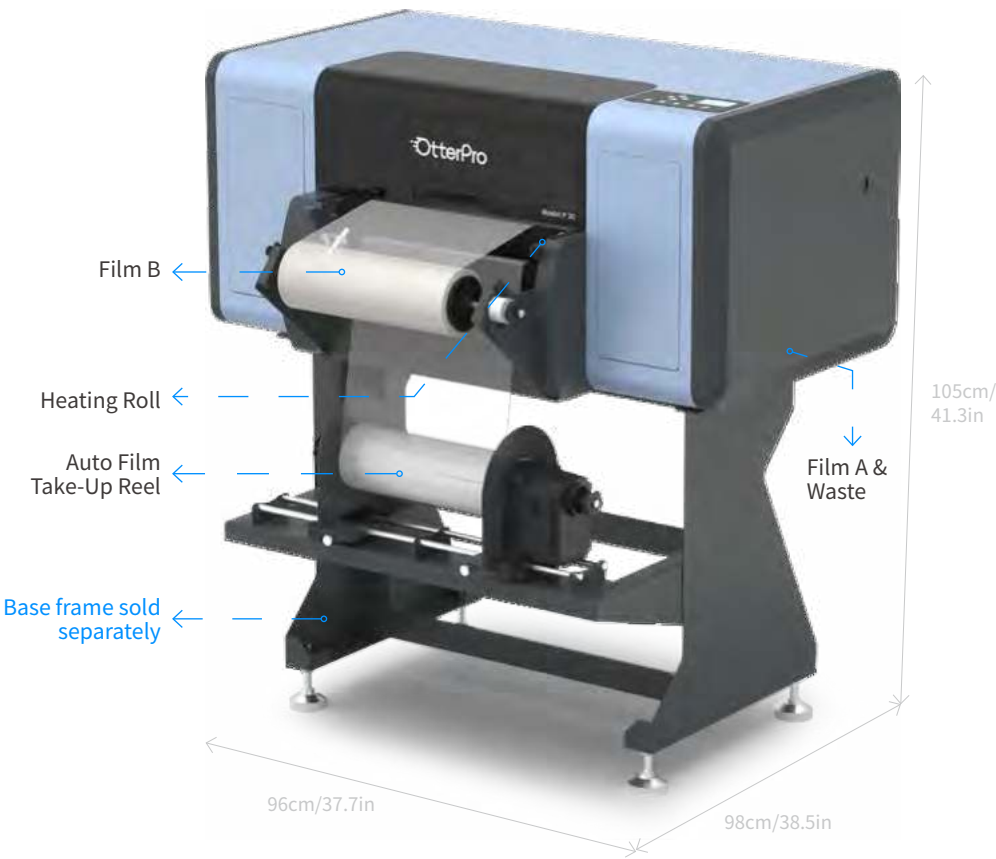

## All-in-One UV DTF System

This automated machine handles printing, lamination, waste film take-up, and puff effect, making it a cost-effective and efficient way to kickstart your business.

Model P 30 Specifications

Model No.	MODEL P30LB	Nozzle Resolution	300npi 600npi
Printhead	Epson i3200-U1 HD x1 (8 Colors)	Print Speed	960*600dpi (4pass) Print Speed: 1.54m²/H 960*900dpi (6pass) Print Speed: 1.04m²/H 960*1200dpi (8pass) Print Speed: 0.74m²/H
Voltage	110V/220V±10% 50Hz-60Hz	Print Mode	Uni-direction / Bi-direction
Power	410W 5A-10A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	Auto white ink circulation system
Printer Software	OtterPro C 30 UV DTF	Printhead Maintenance	Automatic cleaning, ink scraping, moisturizing
Design Software	OtterPro RIP	Heating System	Adjustable heating rollers
Language Options (Software)	Chinese/English/French/German/Italian/Polish/Portuguese/Spanish	Connection Method	Gigabit Ethernet Port (PC must have Gigabit Ethernet Card)
Ink Type	UV DTF Ink	System Requirements	Window 7 or above (macOS system is not supported)
Ink Color	K+C+M+Y+W+W+W+W	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Printing Method	A complete white ink, color, varnish hierarchical order printing	Printer Specification (Base frame not included)	96 x 98 x 45 cm / 37.7 x 38.5 x 17.7 in 75kg / 165lb
Print Width	0-300 mm / 0-11.8 in	Package Dimension	112 x 112 x 63 cm / 44 x 44 x 24.8 in 95kg / 209lb

NOTE:  
The UV DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.






### 3D Relief Effect

Combine 3D PUFF UV DTF ink to effortlessly create raised, tactile designs on fabric with a soft, textured finish.



### High Resolution

Compatible with Epson i3200 U1 printhead with 600 dpi high-density resolution, ensures high color reproduction and high-quality prints.

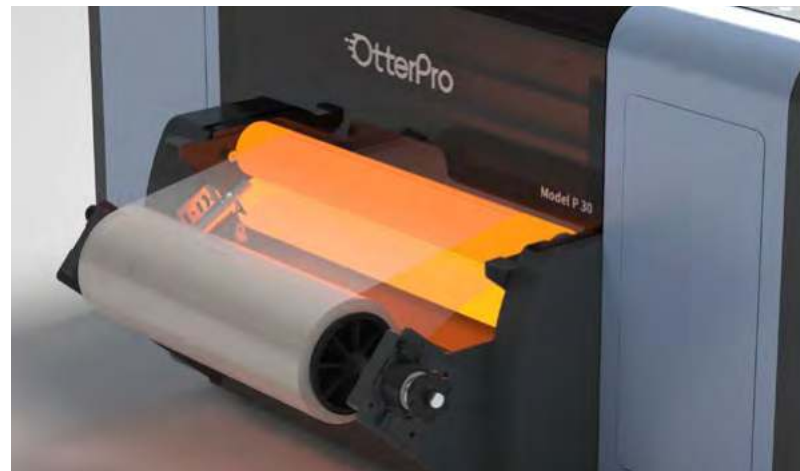

### Adjustable Heating Rollers

Ensuring precise and uniform heat distribution to achieve a bubble-free laminating effect.




### Compact & Desktop

Compact desktop design, no extra stand required, ideal for small batch production at home or workshop.



### Adjustable Vacuum Suction Platform

With an adjustable vacuum suction platform, the film adheres firmly to the platform, ensuring a smooth printing process.

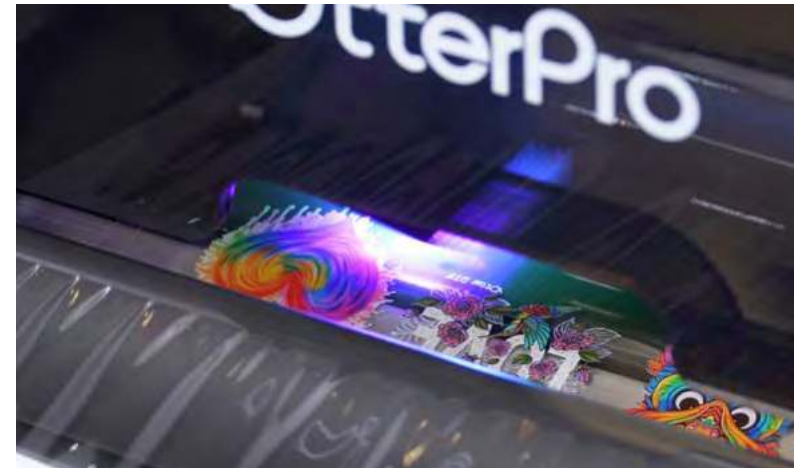


### Built-in UV LED Lights

The built-in ultraviolet lights enable simultaneous printing and curing, and are ready for lamination!



### Auto White Ink Circulation

Equipped with two peristaltic pumps, this system keeps the ink in constant motion, reducing the risk of white ink clogging and extending the service life of your UV DTF printer.

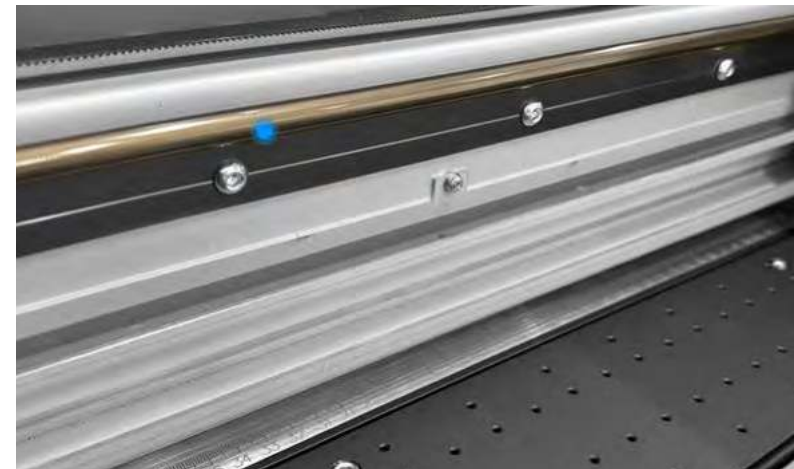

### Mute Guide Rail

The upgraded guide rail ensures high precision and stable performance with minimal noise.





## OtterPro 3D PUFF UV DTF Film (A+B)

Designed for high-quality puff UV DTF printing, this film produces long-lasting, durable stickers that transfer seamlessly onto fabrics, leaving no residue and maintaining flawless detail every time.



P30-3050AB  
A+B Film  
Size: 0.3\*50M

P60-6050AB  
A+B Film  
Size: 0.6\*50M

## OtterPro 3D PUFF UV DTF Ink

Get a raised 3D texture and soft-touch feel with white puff ink.



### 1000ml 3D PUFF UV DTF Ink

P30-INK1000C (Cyan)  
P30-INK1000M (Magenta)  
P30-INK1000Y (Yellow)

P30-INK1000K (Black)  
P30-INK1000W (White)

## 3D PUFF UV DTF Printer-Spare Parts



	Printhead	Printer Mainboard	Printhead Mainboard	Cap Top	Ink Tube	Encoder Strip	Ink Damper	Wiper Blade
Model P 60	C60-PT1600E1	C60-ZB	C60-PTZB	OTTER-40XMD	C30-MG	C30-GST	C60-MN	C30-GMP
Model P 30	C30-PT3200	C30-CZB	C30-PTZB	C30-XMD			C30-MN	





## Mass Production Solution

Experience boundless printing options with our all-in-one DTF system—ideal for large-scale production or small-volume printing. Perfect for retailers or home makers, it integrates printing, powder shaking, heating, and purifying functions, providing efficiency and quality in a compact design. Fully automated features enhance workflow, ensuring high productivity and top-notch output. OtterPro heat presses are designed to give you high-quality prints quickly and easily. The Air Press Series Dual Station Heat Press, in particular, enhances productivity, providing consistent, professional results for mass production.




# Model S 60 All-in-One Otter DTF System

The maximum print size of this large format all-in-one DTF printer is 60cm/23.6in, equipped with two advanced Epson i3200 printheads, this printer delivers faster and more precise prints. It's perfect for printing on larger garments, jeans, trade show banners, posters, and allowing mass production of custom clothing and more large scale projects.



Epson i3200 2 PCS



Print Width  
0-620mm/24.4in Max



Anti-Collision System



Note: The printer and shaker are sold as a set.

Model S 60 Specifications

Model No.	OT-AIODTF60LB	Nozzle Resolution	360npi 480npi
Printhead	Epson i3200 x2	Print Speed (High-speed, Bi-direction)	720*1200dpi (4pass) Print Speed: 14m <sup>2</sup> /H 720*1800dpi (6pass) Print Speed: 10m <sup>2</sup> /H 720*2400dpi (8pass) Print Speed: 6m <sup>2</sup> /H
Voltage/Power	3450W MAX±5% 110V/220V±10% 50Hz-60Hz	Print Mode	Uni-direction / Bi-direction
Max. Input Current	AC220V, 16A / AC110V, 32A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	White ink automatic stirring circulation
Printer Software	OtterPro S 60 DTF	Adsorption Platform	Adjustable suction platform
Design Software	OtterPro RIP	Heating System	Three stages independent heating
Language Options (Software)	Chinese/English/French/German/Italian/ Polish/Portuguese/Spanish	Connection Method	Gigabit ethernet port (PC must have gigabit ethernet card)
Ink Type	Eco textile pigment ink	System Requirements	Window 7 or above (macOS system is not supported)
Ink Color	H1: K+C+M+Y H2: W+W+W+W	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Print Thickness	0-3 mm / 0-0.118 in	Product Dimensions	236 x 156.5 x 141.5 cm / 92.9 x 61.6 x 55.7 in
Print Width	0-620 mm / 0-24.4 in	Gross Weight(with wooden box)	581kg / 1280lb
ACCESSORIES: Cap Top x2, Ink Tube x4, Ribbon Cable x2, Ink Damper x2, Network Cable x1, 20ml Syringe x1, M3 Screw x12, M4 Screw x 6, Power Cord x1, Hex Key Set x1, Phillips Screwdriver x1		Powder Capacity	1.5kg / 3.3lb

NOTE:  
The DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.




# Model S 40 All-in-One Otter DTF System

Model S 40 is an All-in-One DTF printer that combines printing, powder shaking, curing, and purifying in one machine. With a maximum print width of 44.8cm/17.6in, it's compatible with the standard film widths in the market, including 30cm, 33cm, 42cm and more size.



Epson i1600-A1 2 PCS



Print Width  
0-420mm/16.5in Max



NOTE: DTF printer can be sold separately.

Model S 40 Specifications

Model No.	OT-AIODTF40LB	Nozzle Resolution	300npi 600npi
Printhead	Epson i1600-A1 x2	Print Speed (High-speed, Bi-direction)	720*1200dpi (4pass) Print Speed: 3.5-5.0m <sup>2</sup> /H 720*1800dpi (6pass) Print Speed: 2.5-3.5m <sup>2</sup> /H 720*2400dpi (8pass) Print Speed: 2.0-3.0m <sup>2</sup> /H
Voltage	2800W MAX±5% 220V±10% 50Hz	Print Mode	Uni-direction / Bi-direction
Max. Input Current	AC220V,13A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	White ink automatic stirring circulation
Printer Software	OtterPro S 40 DTF	Adsorption Platform	Adjustable suction platform
Design Software	OtterPro RIP	Heating System	Three Stages Independent Heating
Language Options (Software)	Chinese/English/French/German/Italian/ Polish/Portuguese/Spanish	Connection Method	Gigabit Ethernet Port (PC must have Gigabit Ethernet Card)
Ink Type	Eco textile pigment ink	System Requirements	Window 7 or above (macOS system is not supported)
Ink Color	H1: K+C+M+Y H2: W+W+W+W	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Print Thickness	0-3 mm / 0-0.118 in	Product Dimensions	220 x 100 x150 cm / 86.6 x 39.3 x 59 in
Print Width	0-420mm / 16.5in Max	Gross Weight(with wooden box)	380kg / 837lb
ACCESSORIES: Cap Top x2, Ink Tube x4, Ribbon Cable x2, Ink Damper x2, Network Cable x1, 20ml Syringe x1, M3 Screw x12, M4 Screw x 6, Power Cord x1, Hex Key Set x1, Phillips Screwdriver x1		Powder Capacity	1.5kg / 3.3lb

NOTE:  
The DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.

# Powder Shaking System



Auto Film  
Take-Up Reel

Air & Oil Purifier

Adjustable Speed,  
Temperature &  
Power

Auto Drying

Auto Powder  
Recycling System


Simple & Easy  
to Operate

Printing, Shaking &  
Curing Integrated

Suitable for High &  
Low-volume Production


## All-in-One Automated DTF System

Equipped with sensors, the automated system enables one-touch controls for automatic printing, powder shaking, drying, and film winding.

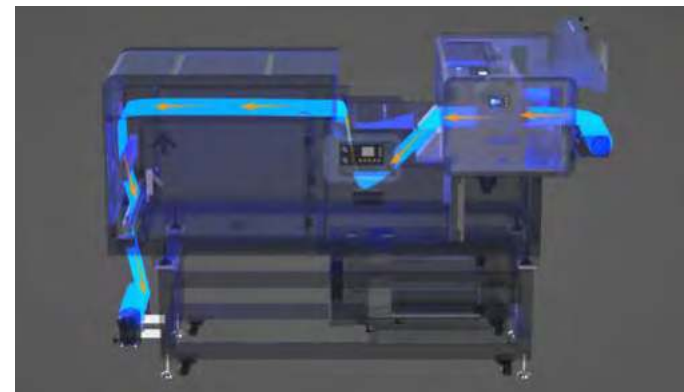


### Control Panel

Manage the speed, power and temperature of the powder shaking and drying system with this intuitive control panel.

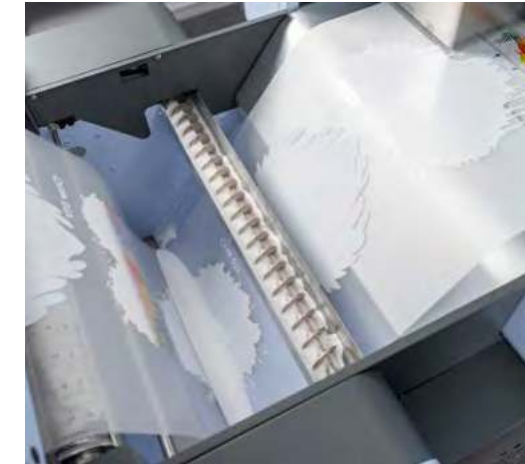

### Auto Powder Recycling System

It can effectively improve the utilization rate of hot melt powder and minimize waste. In addition, it saves the hassle of shaking powder by hand, allowing the powder to be spread more evenly on the film.

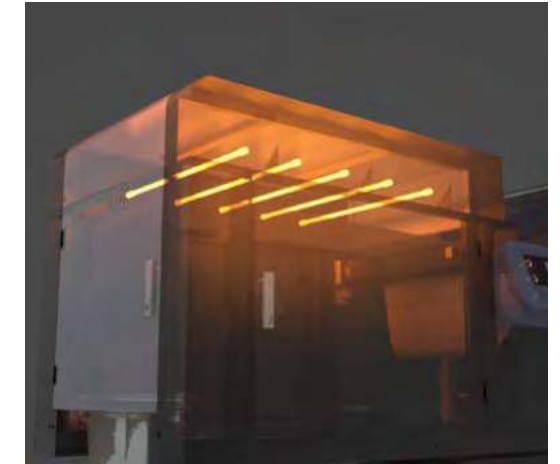


### Curing System

Equipped with five heating tubes and a larger drying area, our drying system ensures more uniform heating for your project, delivering superior outcomes.




### Auto Take-up Reel System

With the automatic take-up reel system, you can free up your hands in the final production stage, achieving intelligent and secure film winding.

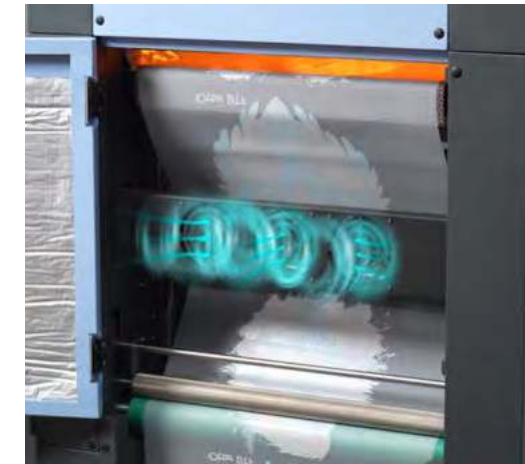

### Built-in Fans

After the printed film is baked in the oven, the built-in fans accelerate film cooling and improve work efficiency.

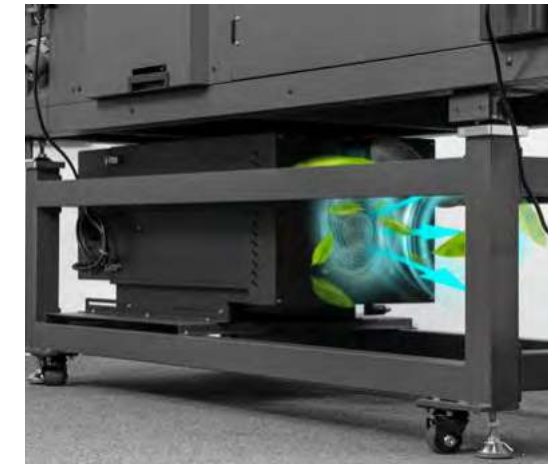


### Integrated Purifier

The air and oil purifier system can automatically treat smoke and oil and promote well-being and productivity. (No need to replace the filter cotton)



# Advantages of Model S Series Printers



## Stable & Quiet

DC motor controller  
Double silent circular guide rails  
Steel body



## Auto System

White ink circulation system  
White ink stirring  
Suction system  
Automatic cleaning  
Adjustable three-stage heating




## Alert System

Low ink alerts  
Waste ink alerts  
Film-out detection


## Adjustable white ink circulation

Consistent Print Quality. Increased Efficiency. Cost Savings.  
Peristaltic pump with moderate pressure and great gas sealing to protect the printhead.

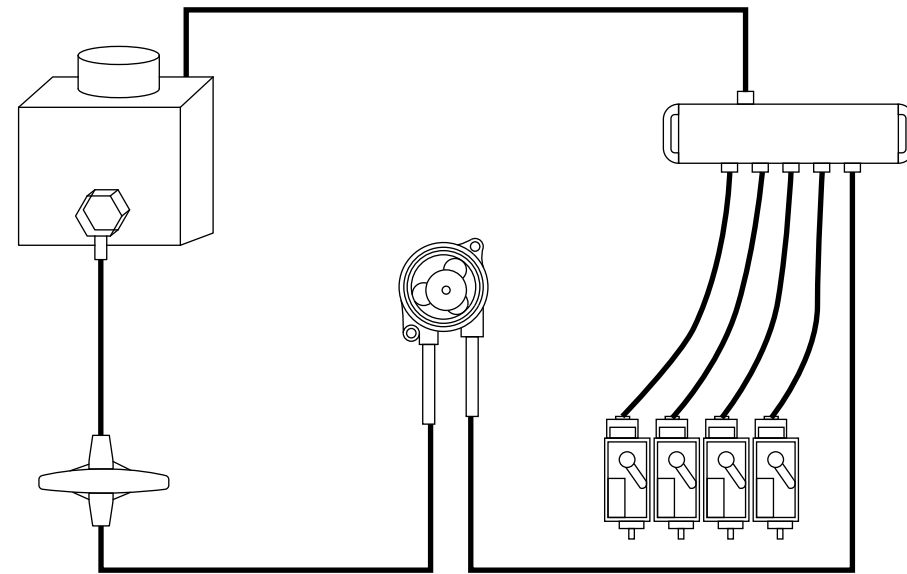


## Ink Supply System

Clear ink markings save the hassle of pouring the wrong ink. The built-in alarm sensor reminds you to add ink in time, minimizing damage to the printer.

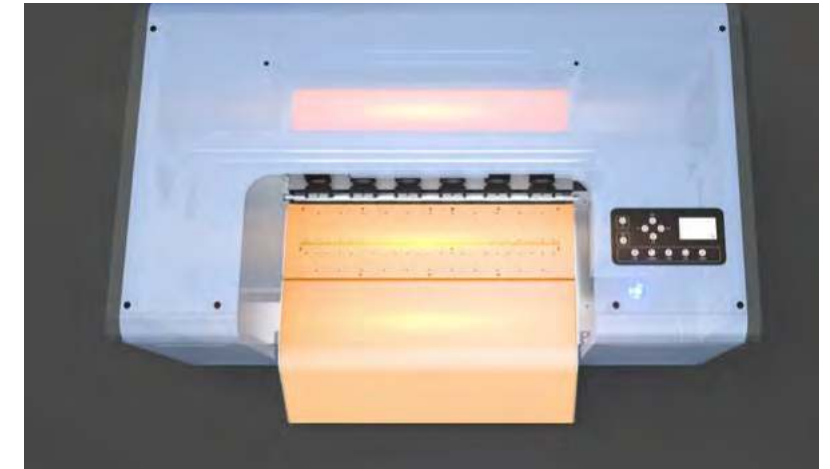


## Three-stage Heating System

Accelerate DTF Ink drying speed on the film to guarantee optimal image quality before applying powder.

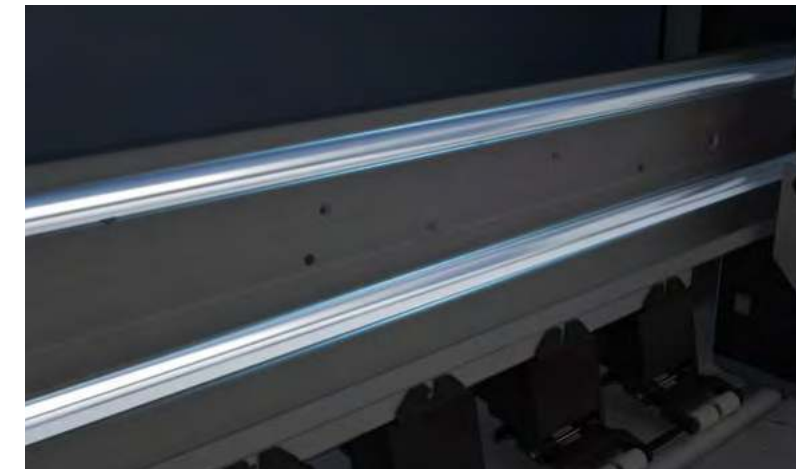

## Mute Guide Rail

Enhance operational stability with minimal noise.

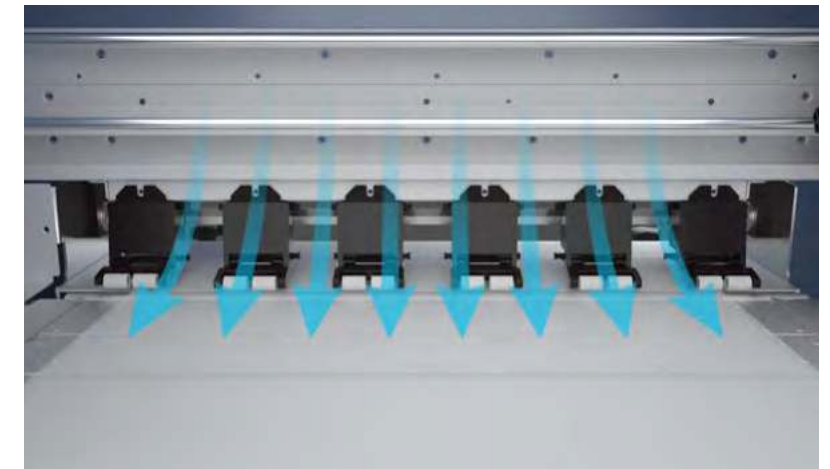


## Adjustable Vacuum Suction Platform


Deliver precise color printing with no deviations, ensuring a flat and seamless film output.

# Model M 30 DTF Printer

Model M 30 is a compact, desktop DTF printer perfect for home use and workshop. The maximum print size is 330mm/13in, ideal for most small business needs. It's equipped with an Epson F1080 printhead for stable and precise prints. Plus, it also comes with a handy cutter that makes film cutting easier.



Epson XP600(F1080) 1 PCS



Print Width  
0-330mm/13in Max



Detachable  
Film Trimmer



Adjustable System  
White ink circulation system  
White ink stirring  
Suction system  
Front stage heating



Auto System  
Automatic cleaning



Alert System  
Waste ink alerts



Glue-Sealed Printhead  
Connector  
Waterproof design prevents  
burnout



Model M 30 Specifications

Model No.	MODEL M30LB	Print Accuracy	1440dpi
Printhead	Epson XP600(F1080) x1	Print Speed	720*900dpi (4pass) Print Speed: 4m <sup>2</sup> /H 720*1080dpi (6pass) Print Speed: 2m <sup>2</sup> /H 720*1400dpi (8pass) Print Speed: 1.2m <sup>2</sup> /H
Voltage	110V/220V±10% 50Hz-60Hz	Print Mode	Uni-direction / Bi-direction
Power	300W 5A-10A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	Adjustable white ink circulation system Adjustable white ink stirring
Printer Software	OtterPro M 30 DTF	Adsorption Platform	Adjustable suction system
Design Software	OtterPro RIP	Heating System	Adjustable front stage heating
Language Options (Software)	Chinese/English/French/German/Italian/ Polish/Portuguese/Spanish	Connection Method	3.0 USB cable
Ink Type	Eco Textile Pigment Ink	System Requirements	Window 7 or above (macOS system is not supported)
Ink Color	H1: K+C+M+Y +W	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Print Thickness	0-3 mm / 0-0.118 in	Printer Specification	78.5 x 70.5 x 39.5 cm / 30.9 x 27.7 x 15.5 in 37kg / 81lb
Print Width	0-330 mm / 0-13in	Package Dimension	103.5 x 48 x 54.5 cm / 40.7 x 18.8 x 21.4 in 50kg / 110lb

ACCESSORIES:  
Ink Damper X3, Cap Top X1, Ink Pump x1, Ribbon Cable X2, Sensor Limit Switch x1, Ink Tube X1, Peristaltic Pump X1, Syringe X1, Bubble Level x1, Hex Key Set X1, Phillips Screwdriver X1, M4 Screw Set X1, Encoder Strip X1, Glove X2, Wiper Blade X1

NOTE:  
The DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.





### Compact & Desktop

Compact desktop design, no extra stand required, ideal for small batch production at home or workshop.



### Detachable Film Trimmer

With the detachable film trimmer, you can easily cut the film to fit your oven dryer, or detach it as an individual trimmer for your craft projects.



### Adjustable White Ink Circulation

The white ink circulation system effectively prevents sedimentation and lowers the probability of printhead clogging.




### Auto Cleaning

It helps to maintain print quality and prevent clogging of the printheads.



### Adjustable Pinch Rollers

This design ensures the film moves smoothly and consistently, without any slippage.

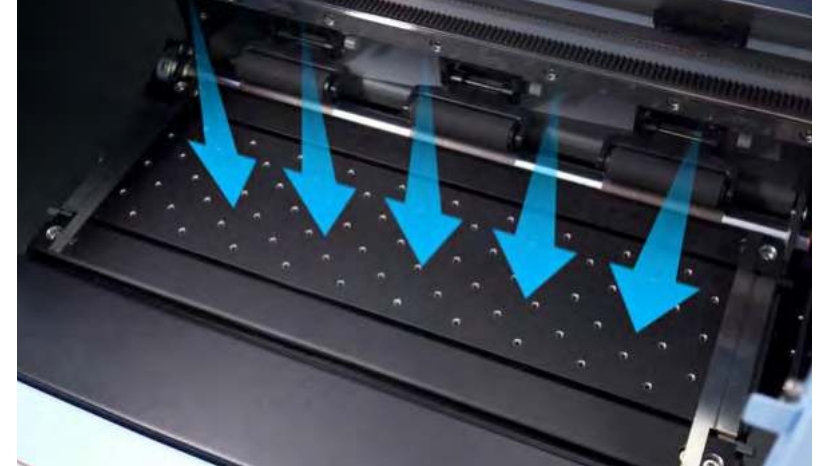

### Adjustable Suction Platform

Deliver precise color printing with no deviations, ensuring a flat and seamless film output.



### Heating Platform

Accelerate DTF Ink drying speed on the film to guarantee optimal image quality before applying powder.



### Inspection Door

This lift-up opening design makes maintenance easier and also has space for storing screws and other items while you work.



# HOT & COLD PEEL DTF FILM

## DOUBLE-SIDED MATTE

The double-sided matte DTF film features an anti-static design, the pre-treated film that ensures smooth, non-slip printing. Its strong adhesion absorbs DTF inks, ensuring high definition and vibrant color output.

Size	DOUBLE-SIDED
A3	OT-DTFFILMA3
A4	OT-DTFFILMA4
0.3m*10m	OT-DTFFILM3010
0.3m*100m	OT-DTFFILM30100
0.42m*100m	OT-DTFFILM42100
0.6m*100m	OT-DTFFILM60100



Breathable



Soft Texture



Wash-Resistant



Long-Lasting



Vibrant Color



High Definition



Strong Adhesion



Stretchable



## Gradient Series/Glitter Series/Glow in Dark

### COLD PEEL



GOLD



GRADIENT



GLITTER SILVER



GLITTER GOLD



GLITTER RAINBOW



HOLOGRAPHIC



GLOW IN DARK

Size	GOLD	GRADIENT	GLITTER SILVER	GLITTER GOLD	GLITTER RAINBOW	HOLOGRAPHIC	GLOW IN DARK
A3	OT-DTFFILMGDA3	OT-DTFFILMJBA3	OT-DTFFILMZSA3	OT-DTFFILMSGA3	OT-DTFFILMXCA3	OT-DTFFILMHCA3	OT-DTFFILMYGA3
A4	OT-DTFFILMGDA4	OT-DTFFILMJBA4	OT-DTFFILMZSA4	OT-DTFFILMSGA4	OT-DTFFILMXCA4	OT-DTFFILMHCA4	OT-DTFFILMYGA4
0.3m*10m	OT-DTFFILMGD3010	OT-DTFFILMJB3010	OT-DTFFILMZS3010	OT-DTFFILMSG3010	OT-DTFFILMXC3010	OT-DTFFILMHC3010	OT-DTFFILMYG3010
0.3m*100m	OT-DTFFILMGD30100	OT-DTFFILMJB30100	OT-DTFFILMZS30100	OT-DTFFILMSG30100	OT-DTFFILMXC30100	OT-DTFFILMHC30100	OT-DTFFILMYG30100
0.42m*100m	OT-DTFFILMGD42100	OT-DTFFILMJB42100	OT-DTFFILMZS42100	OT-DTFFILMSG42100	OT-DTFFILMXC42100	OT-DTFFILMHC42100	OT-DTFFILMYG42100
0.6m*100m	OT-DTFFILMGD60100	OT-DTFFILMJB60100	OT-DTFFILMZS60100	OT-DTFFILMSG60100	OT-DTFFILMXC60100	OT-DTFFILMHC60100	OT-DTFFILMYG60100

## Available Sizes for All DTF Film



21 cm x 30 cm  
8.3 in x 11.8 in



30 cm x 42 cm  
11.8 in x 16.5 in



30 cm x 10 m  
11.8 in x 32.8 ft



30 cm x 100 m  
11.8 in x 328 ft



42 cm x 100 m  
16.5 in x 328 ft



60 cm x 100 m  
23.6 in x 328 ft



## OtterPro Ultra DTF Ink

OtterPro Ultra DTF ink is an eco-friendly, water-based ink made with non-toxic ingredients and a special formula. When used with OtterPro Precipitation-Free DTF White Ink, it ensures clog-free printheads and provides smooth, consistent ink flow without settling.



Clog-Free Printheads



Easy to Transfer



Eco-friendly



Deep Whites for Vibrant Results



### 500ml Ultra DTF Ink

High Density Anti-clog Ink

OT-DTFINKS500C (Cyan)  
OT-DTFINKS500M (Magenta)  
OT-DTFINKS500Y (Yellow)  
OT-DTFINKS500K (Black)  
OT-DTFINKS500W (White)



### 1000ml Ultra DTF Ink

High Density Anti-clog Ink

OT-DTFINKS1000C (Cyan)  
OT-DTFINKS1000M (Magenta)  
OT-DTFINKS1000Y (Yellow)  
OT-DTFINKS1000K (Black)  
OT-DTFINKS1000W (White)

## OtterPro DTF ink

### Sustainable Inks

OtterPro DTF pigment ink is eco-friendly and water-based ink, made with non-toxic ingredients that are safe to use and soft to the touch, perfectly in line with our commitment to sustainability.



Eco-friendly



Easy to Transfer



Deep Whites for Vibrant Results



500ml DTF ink

OT-DTFINK500C (Cyan)  
OT-DTFINK500M (Magenta)  
OT-DTFINK500Y (Yellow)  
OT-DTFINK500K (Black)  
OT-DTFINK500W (White)



1000ml DTF ink

OT-DTFINK1000C (Cyan)  
OT-DTFINK1000M (Magenta)  
OT-DTFINK1000Y (Yellow)  
OT-DTFINK1000K (Black)  
OT-DTFINK1000W (White)

## Classic DTF Powder



Strong Adhesion



Good Wash Durability



Eco-friendly



Cost-effective



High Color Fastness



No Color Fading

## Black DTF Powder



OT-DTFPDT600 600g  
OT-DTFPDT1000 1000g



OT-DTFRRF500 500g  
OT-DTFRRF1000 1000g  
OT-DTFRRF3500 3500g



OT-UTRRF1000PK 500g(Black)

DTF Printer-Spare Parts



	Printhead	Printer Mainboard	Printhead Mainboard	Cap Top	Ink Tube	Encoder Strip	Drive Belt
Model S 60 DTF	<a href="#">OTTER-I3200A1PT</a>	<a href="#">OTTER-60ZB</a>	<a href="#">OTTER-60PTZB</a>	<a href="#">OTTER-60XMD</a>	<a href="#">OTTER-60MG</a>	<a href="#">OTTER-60GST</a>	<a href="#">OTTER-60CSD</a>
Model S 40 DTF	<a href="#">OTTER-I1600PT</a>	<a href="#">OTTER-40ZB</a>	<a href="#">OTTER-40PTZB</a>	<a href="#">OTTER-40XMD</a>	<a href="#">OTTER-40MG</a>	<a href="#">OTTER-40GST</a>	<a href="#">OTTER-40CSD</a>
Model M 30 DTF	<a href="#">M30-PTF1080</a>	<a href="#">M30-ZB</a>	<a href="#">M30-PTZB</a>	<a href="#">M30-XMD</a>	<a href="#">M30-MG</a>	<a href="#">M30-GST</a>	<a href="#">M30-CSD</a>



	Temp. Control Mainboard	White Ink Circulation Splitter	Ink Filter	Wiper Blade	Ink Damper
Model S 60 DTF/ Model S 40 DTF	<a href="#">OTTER-40WKZB</a>	<a href="#">OTTER-40FLQ</a>	<a href="#">OTTER-40GLQ</a>	<a href="#">OTTER-40GMP</a>	<a href="#">OTTER-40MN</a>
Model M 30 DTF	/	/	/	<a href="#">M30-GMP</a>	<a href="#">M30-MN</a>

\*Subject to the specifications of the actual product.

Tri-layer A3 DTF  
Dryer Pro & Air  
Purifier

It's the perfect companion for most desktop DTF printers and an essential tool for making samples before mass production.



Even Heating

The desktop DTF dryer features a hot air circulation design that ensures even heating and melting powder, delivering crisper, more durable and vibrant prints.

Better Results: The upgraded heating tunnel prevents oiling with a better curing effect

Max. temperature up to 150°C

Item No.	<a href="#">OT-DRYA3LB (Dryer)</a>	<a href="#">OT-FLLB (Purifier)</a>	Voltage	220V / 110V 50~60Hz
Power	1450W MAX±5%	150W MAX±5%	Temp. Range	104-302 °F (40-150°C )
Size	544*603*303mm	365*325*525mm	Time Range	1-60min
Weight	14.5 kg	9.5 kg	Film Size	300 x 420mm / 11.8 x 16.5 in




OtterPro portable purifier provides you a fresh air throughout your workspace. Easy to carry, simple to use. Experience an atmosphere that promotes well-being and productivity with our efficient air purification system.



High Efficiency

The maximum curing size is 30x42cm/11.8x16.5in, its three-layer design dries 3 sheets of A3 or 6 sheets of A4 film at a time, making it an efficient choice for DTF projects.



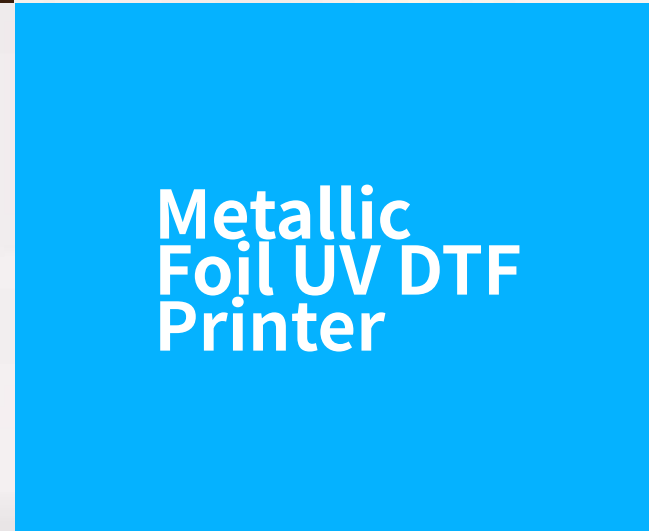



## Model C 60 UV DTF Printer

Model C 60 is a large-format UV DTF printer with a maximum print width of 62cm (24.4 inches). Equipped with 3 Epson i1600-E1 printheads, specifically designed for industrial-grade printing, it delivers exceptional performance for handling larger sizes and high-volume UV DTF printing tasks. This printer is built to meet the demands of business and industrial production, ensuring efficiency, reliability, and superior print quality for your projects.



### Standard Clear UV DTF Printing


UV DTF Sticker  
Only for UV DTF sticker.



3 Printheads: KCMY+White+Varnish



**Epson i1600-E1  
3 PCS**



**Print Width**  
0-620 mm / 0-24.4 in MAX



### Auto System

White ink stirring  
Suction system  
Automatic cleaning  
Adjustable heating rollers



### Alert System

Low ink alerts  
Film-out detection

## Model C 60 Pro UV DTF Printer

The C 60 Pro is an upgraded version of the C 60, featuring stunning metallic foil printing that creates intricate, eye-catching designs with a luxurious shimmer—perfect for premium branding, packaging, and more.



### Dual Printing Modes


UV DTF Sticker + Metallic Foil UV DTF  
Just replace different film rolls, achieving different printing effects.



4 Printheads: KCMY+White+Glue+Varnish



**Epson i1600-E1  
4 PCS**



**Print Width**  
0-620 mm / 0-24.4 in MAX



### Auto System

White ink stirring  
Suction system  
Automatic cleaning  
Adjustable heating rollers




### Alert System

Low ink alerts  
Film-out detection



# ALL-IN-ONE UV DTF SYSTEM

This automated machine handles printing, lamination, waste film take-up, and foil-stamping effects, making it a cost-effective and efficient way to kickstart your business.

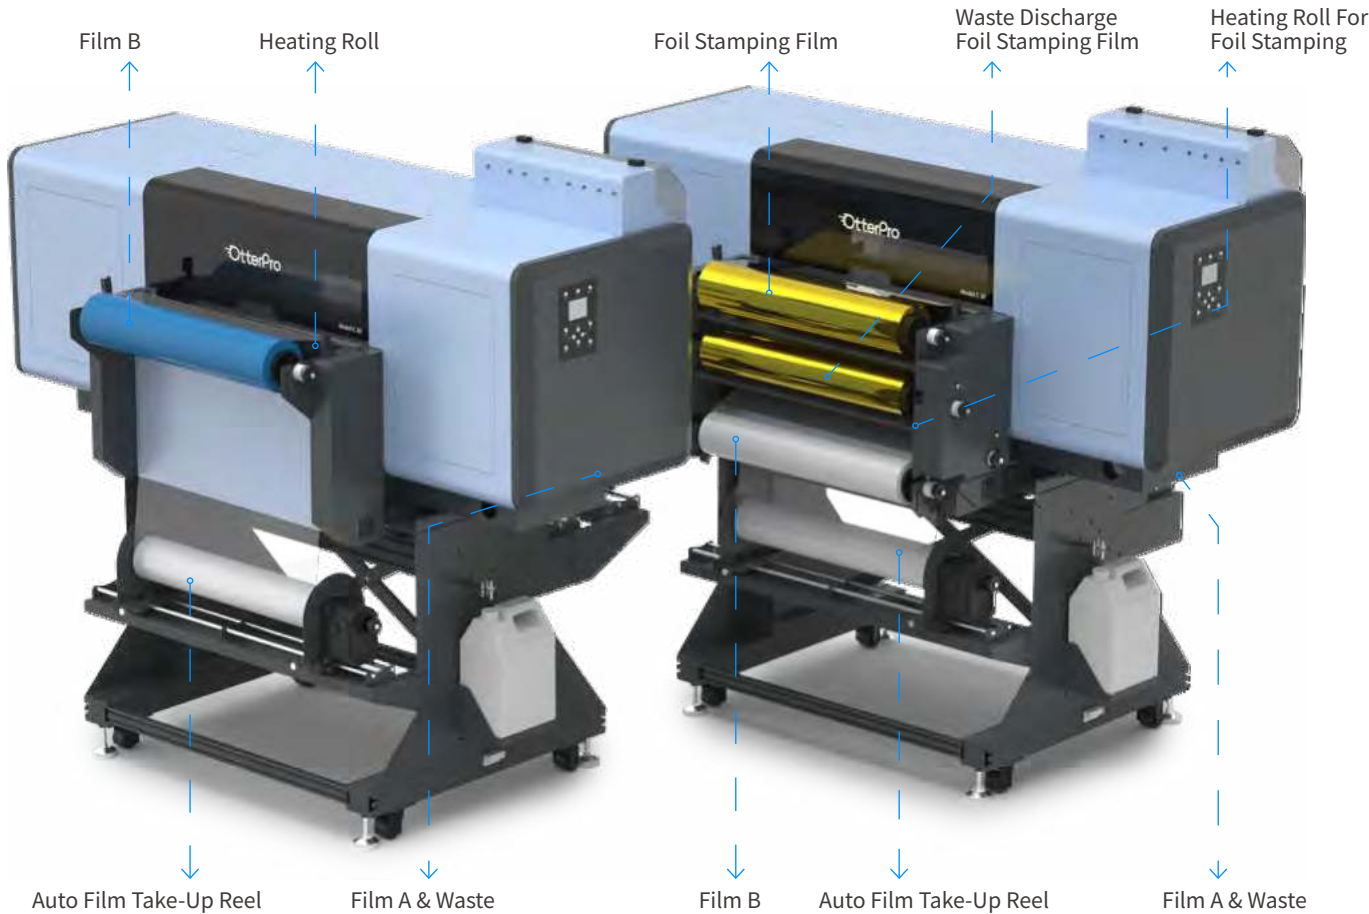

## Model C 60 Specifications

Model No.	MODEL C60LB/MODEL C60PROLB	Nozzle Resolution	300npi 600npi
Printhead	EPSON i1600 E1 x3/4	Print Speed	960*900dpi (6pass) Print Speed: 3.5-5.0m <sup>2</sup> /H 960*1200dpi (8pass) Print Speed: 2.5-3.5m <sup>2</sup> /H
Voltage	110V/220V±10% 50-60Hz	Print Mode	Uni-direction / Bi-direction
Power	330W 5A-10A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	Auto white ink stirring
Printer Software	OtterPro C 60 UV DTF	Printhead Maintenance	Automatic cleaning, ink scraping, moisturizing
Design Software	OtterPro RIP	Heating System	Adjustable heating rollers
Language Options (Software)	Chinese/English/French/German/Italian/Polish/Portuguese/Spanish	Connection Method	Gigabit Ethernet Port (PC must have Gigabit Ethernet Card)
Ink Type	UV DTF Ink	Inspection System	Low ink alerts / Film-out detection
Ink Color	H3: K+C+M+Y H4: V+V+GV+GV H2: W+W+W+W H1: G+G+G+G	System Requirements	Window 7 or above (macOS system is not supported)
Printing Method	A complete white ink, color, varnish hierarchical order printing	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Print Thickness	0-3 mm / 0-0.078 in	Printer Specification	170 x 107 x 154 cm / 66.9 x 42.1 x 60.6 in 280kg / 617lb
Print Width	0-620 mm / 0-24.4 in	Package Dimension	148 x 220 x 110 cm / 58.2 x 86.6 x 43.3 in 350kg / 771lb

**NOTE:**  
The UV DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.



### 3D Relief Effect

Featuring Epson's original multi-printhead design, it effortlessly creates 3D relief effects & textures on both soft & hard substrates.



### Smart Auto System

Features automatic cleaning, self-maintenance, low ink alerts, and film-out detection.




### Mute Guide Rail

Mute Guide Rail Equipped with industry-leading guide rails, this printer ensures high precision and stable performance with minimal noise.



### Three-stage Vacuum Suction Platform

The 3-stage adjustable vacuum suction platform holds films securely in place, ensuring smooth, flawless printing every time, while also preventing printhead scratches from film contact.

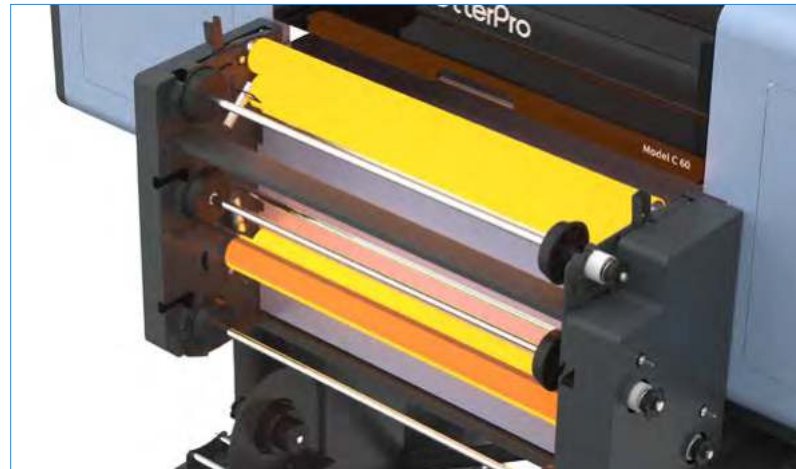


### Adjustable Heating Rollers

Ensuring precise and uniform heat distribution to achieve a bubble-free laminating effect.



### Leadshine Stepper Motor

The advanced industrial-quality motor ensures smooth, precise and stable motion for your projects.

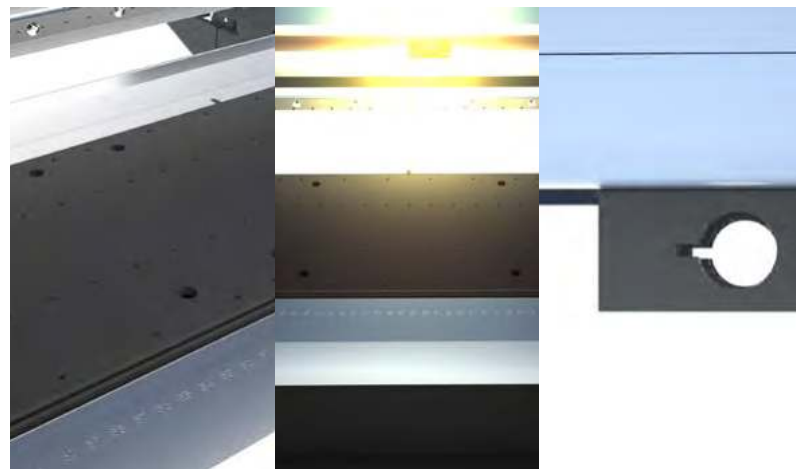

### Premium Construction Features

Corrosion-resistant treated surface and print platform for enhanced durability; integrated LED lights for illumination; the base frame features designed cutouts for convenient machine relocation.



### Adjustable White Ink Auto Stirring

Prevent white ink precipitation, minimize clogging risks, and extend the lifespan of your UV DTF printer.




# Model C 30 UV DTF Printer

Model C 30 is a UV DTF printer that combines printing and lamination in one machine. No heat press is required, apply your stickers onto wood, metal, plastic, glass, acrylic, paper and almost any smooth, hard, cylindrical objects with ease!



Epson i3200-U1 HD  
1 PCS




Print Width  
0-300mm/11.8in Max



Alert System  
Low ink alerts  
Waste ink alerts



Auto System  
White ink circulation system  
Suction system  
Automatic cleaning  
Adjustable heating rollers

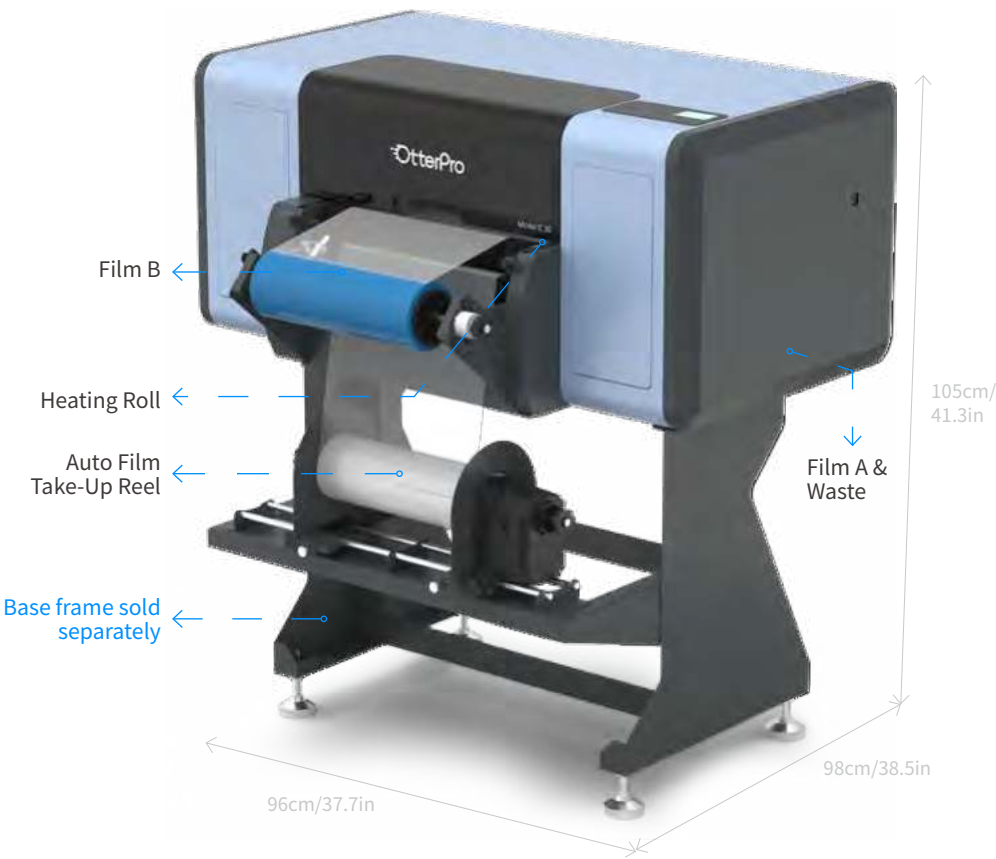

## All-in-One UV DTF System

This automated machine handles printing, lamination, waste film take-up, and puff effect, making it a cost-effective and efficient way to kickstart your business.

Model C 30 Specifications

Model No.	MODEL C30LB	Nozzle Resolution	300npi 600npi
Printhead	Epson i3200-U1 HD x1 (8 Colors)	Print Speed	960*600dpi (4pass) Print Speed: 1.54m <sup>2</sup> /H 960*900dpi (6pass) Print Speed: 1.04m <sup>2</sup> /H 960*1200dpi (8pass) Print Speed: 0.74m <sup>2</sup> /H
Voltage	110V/220V±10% 50Hz-60Hz	Print Mode	Uni-direction / Bi-direction
Power	410W 5A-10A	Operating Environment	Temperature: 15-30°C Humidity: 35-65% (no condensation)
Language Options (Control Panel)	Chinese/English	Ink Stirring System	Auto white ink circulation system
Printer Software	OtterPro C 30 UV DTF	Printhead Maintenance	Automatic cleaning, ink scraping, moisturizing
Design Software	OtterPro RIP	Heating System	Adjustable heating rollers
Language Options (Software)	Chinese/English/French/German/Italian/Polish/Portuguese/Spanish	Connection Method	Gigabit Ethernet Port (PC must have Gigabit Ethernet Card)
Ink Type	UV DTF Ink	System Requirements	Window 7 or above (macOS system is not supported)
Ink Color	K+C+M+Y+W1+W2+V1+V2	Supported Formats	BMP, JPG, PNG, TIFF, TIF, PDF
Printing Method	A complete white ink, color, varnish hierarchical order printing	Printer Specification (Base frame not included)	96 x 98 x 45 cm / 37.7 x 38.5 x 17.7 in 75kg / 165lb
Print Width	0-300 mm / 0-11.8 in	Package Dimension	112 x 112 x 63 cm / 44 x 44 x 24.8 in 95kg / 209lb

NOTE:  
The UV DTF printer is covered by a 2-year limited warranty. Additionally, parts that come in contact with ink, including ink cartridges, printheads, wiper blades, and other consumable parts, are also covered under warranty with an extra cost.



### High Resolution

Compatible with Epson i3200 u1 printhead with 600 dpi high-density resolution, ensures high color reproduction and high-quality prints.




### Adjustable Heating Rollers

Ensuring precise and uniform heat distribution to achieve a bubble-free laminating effect.



### Compact & Desktop

Compact desktop design, no extra stand required, ideal for small batch production at home or workshop.

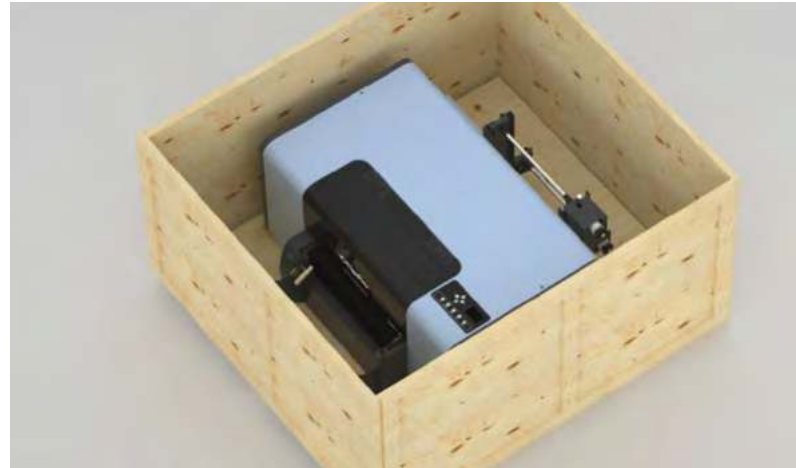


### Integrated Printing & Lamination

Model C 30 integrates printing, curing, and laminating in a single process. No heat press and cutter required to create permanent stickers for your projects. (Extra protection for integrity and safe transport)



### Adjustable Vacuum Suction Platform

With an adjustable vacuum suction platform, the film adheres firmly to the platform, ensuring a smooth printing process.

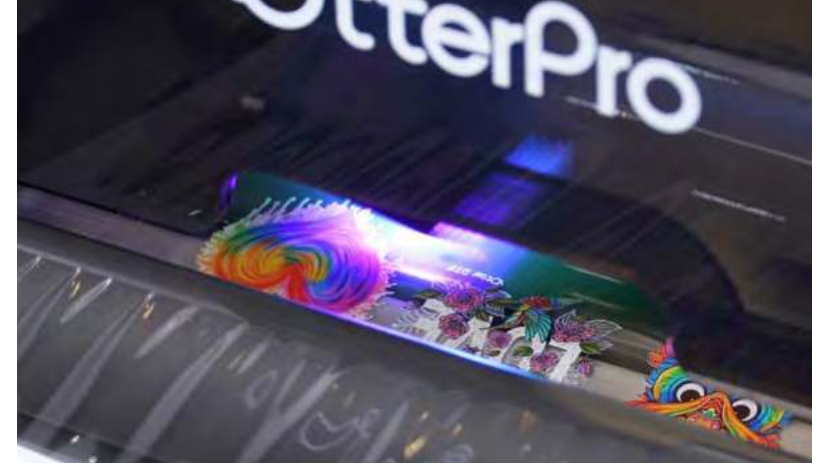


### Built-in UV LED Lights

The built-in ultraviolet lights enable simultaneous printing and curing, and are ready for lamination!



### Auto White Ink Circulation

Equipped with two peristaltic pumps, this system keeps the ink in constant motion, reducing the risk of white ink clogging and extending the service life of your UV DTF printer.

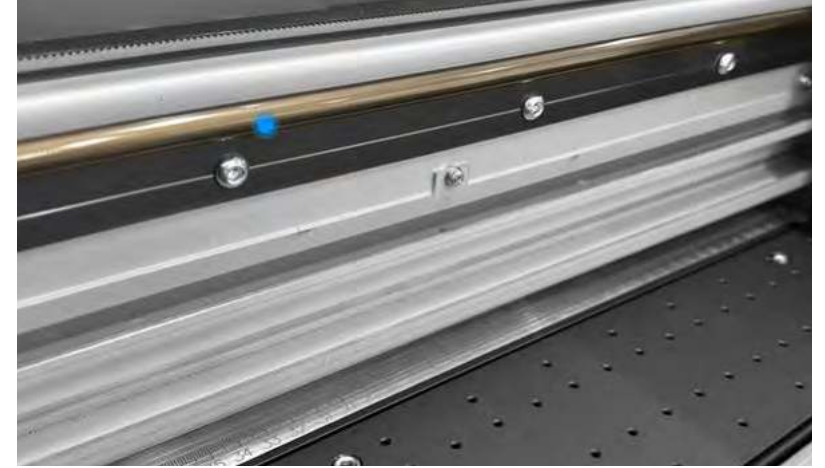

### Mute Guide Rail

The upgraded guide rail ensures high precision and stable performance with minimal noise.



# OtterPro UV DTF Film (A+B)

For Hard Surface Sticker



## Ultra UV DTF Transfer Film

C3030100TAB  
A Film+B Film  
Size: 0.3\*100M

C3060100TAB  
A Film+B Film  
Size: 0.6\*100M

## UV DTF Transfer Film

C3032100CA  
UV DTF A Film  
Size: 0.32\*100M

C3032100CB  
UV DTF B Film  
Size: 0.32\*100M

# OtterPro UV DTF Ink

OtterPro UV DTF ink is a specially formulated oil-based ink that ensures smooth, consistent flow without clogging the printhead. Its high color density delivers rich, vibrant colors for your prints.



## 500ml UV DTF ink

C30-INK500C (Cyan)  
C30-INK500M (Magenta)  
C30-INK500Y (Yellow)  
C30-INK500K (Black)  
C30-INK500W (White)  
C30-INK500V (Vanish)


# UV DTF Printer-Spare Parts



	Printhead	Printer Mainboard	Printhead Mainboard	Cap Top	Ink Tube	Encoder Strip	Ink Damper	Wiper Blade
Model C 60 Pro Model C 60	C60-PT1600E1	C60-ZB	C60-PTZB	OTTER-40XMD	C30-MG	C30-GST	C60-MN	C30-GMP
Model C 30	C30-PT3200	C30-CZB	C30-PTZB	C30-XMD			C30-MN	

\*Subject to the specifications of the actual product.

# OtterPro Multi-language RIP Software

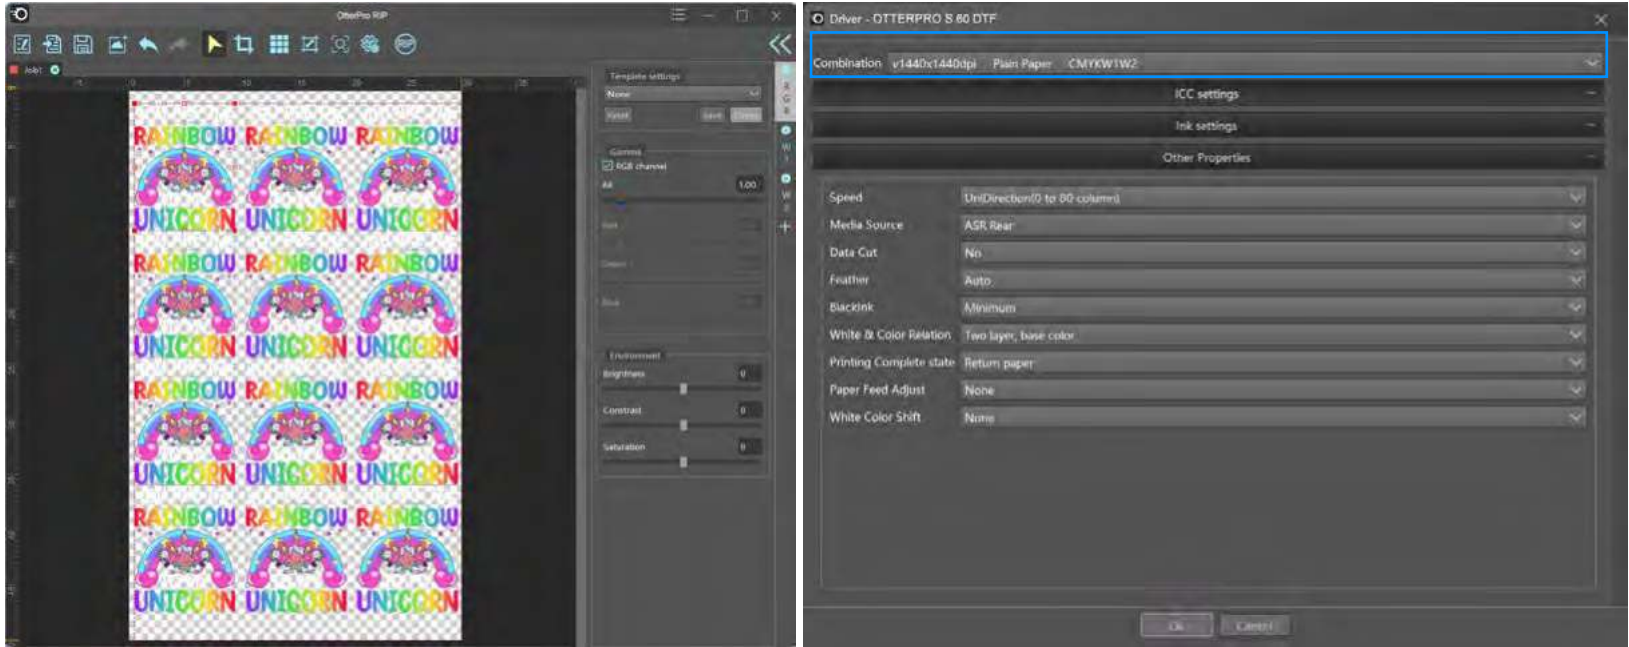

## Auto Layout

Batch printing with high efficiency

## Customized ICC Profiles

Streamlining your workflow for optimal productivity.



## OtterPro RIP Software

This software significantly boosts the productivity of DTF printing projects! It features a simple yet powerful interface, enabling you to effortlessly master image editing and design. Moreover, it supports multi-image automatic layout and duplicate printing, greatly enhancing work efficiency. The superior color output ensures DTF printers achieve "what you see is what you get" results!

## You don't need to select a channel!

Skip configuring a specific channel in your Photoshop software for your current print job. Just save your file in PNG transparent format, export it, and print directly. This saves time and eliminates hassle, allowing for easy management of your software.

## Applicable to all OtterPro Printer Systems

- ☑ Model S 60
- ☑ Model S 40
- ☑ Model M 30
- ☑ Model C 60
- ☑ Model C 60 Pro
- ☑ Model C 30
- ☑ Model P 60
- ☑ Model P 30

## DTF Maintenance Solution



**DTFPJ-100GQXY**  
DTF Cleaning  
Solution- Printhead  
Cleaning  
(100ml)



**DTFPJ-1000GQXY**  
DTF Cleaning Solution-  
Printhead Cleaning  
(1000ml)



**OT-DTFINKS500QXY**  
Ultra DTF Cleaning  
Solution  
**Only for Ultra DTF Ink**  
(500ml)



**DTFPJ-1000XLY**  
DTF Cleaning Solution  
- Printhead Repair  
(1000ml)



**DTFPJ-1000BSY**  
DTF Moisturizing  
Solution  
(1000ml)



**CEDTF-BHY500**  
DTF Moisturizing  
Solution  
(500ml)

## UV DTF Maintenance Solution



**UVDTFPJ-1000BSY**  
UV DTF Moisturizing  
Solution  
(1000ml)



**UVDTFPJ-1000QXY**  
UV DTF Cleaning  
Solution  
(1000ml)



**UVDTFPJ-100QXY**  
(100ml) UV DTF Oil-based Cleaning Solution  
Washing Solution 1  
Cleaning Solution 2  
Protection Solution 3

## Other Maintenance Supplies



**DTFPJ-QJB**  
Cleaning Swab  
(50pcs)



**DTFPJ-6WCB**  
9 x 9in Ultra Soft  
Lint-free Wiper  
(100pcs)



**DTFPJ-9WCB**  
9 x 9in Lint-free Wiper  
(150pcs)



**CEDTFP-ZT**  
Plastic Syringe




**DTFPJ-LD**  
Plastic Funnel  
with Filter



**DTFPJ-RHZ**  
Lubricating Grease  
(20ml)



**DTFPJ-RHY**  
Ultra Lubricating Oil  
(20ml)

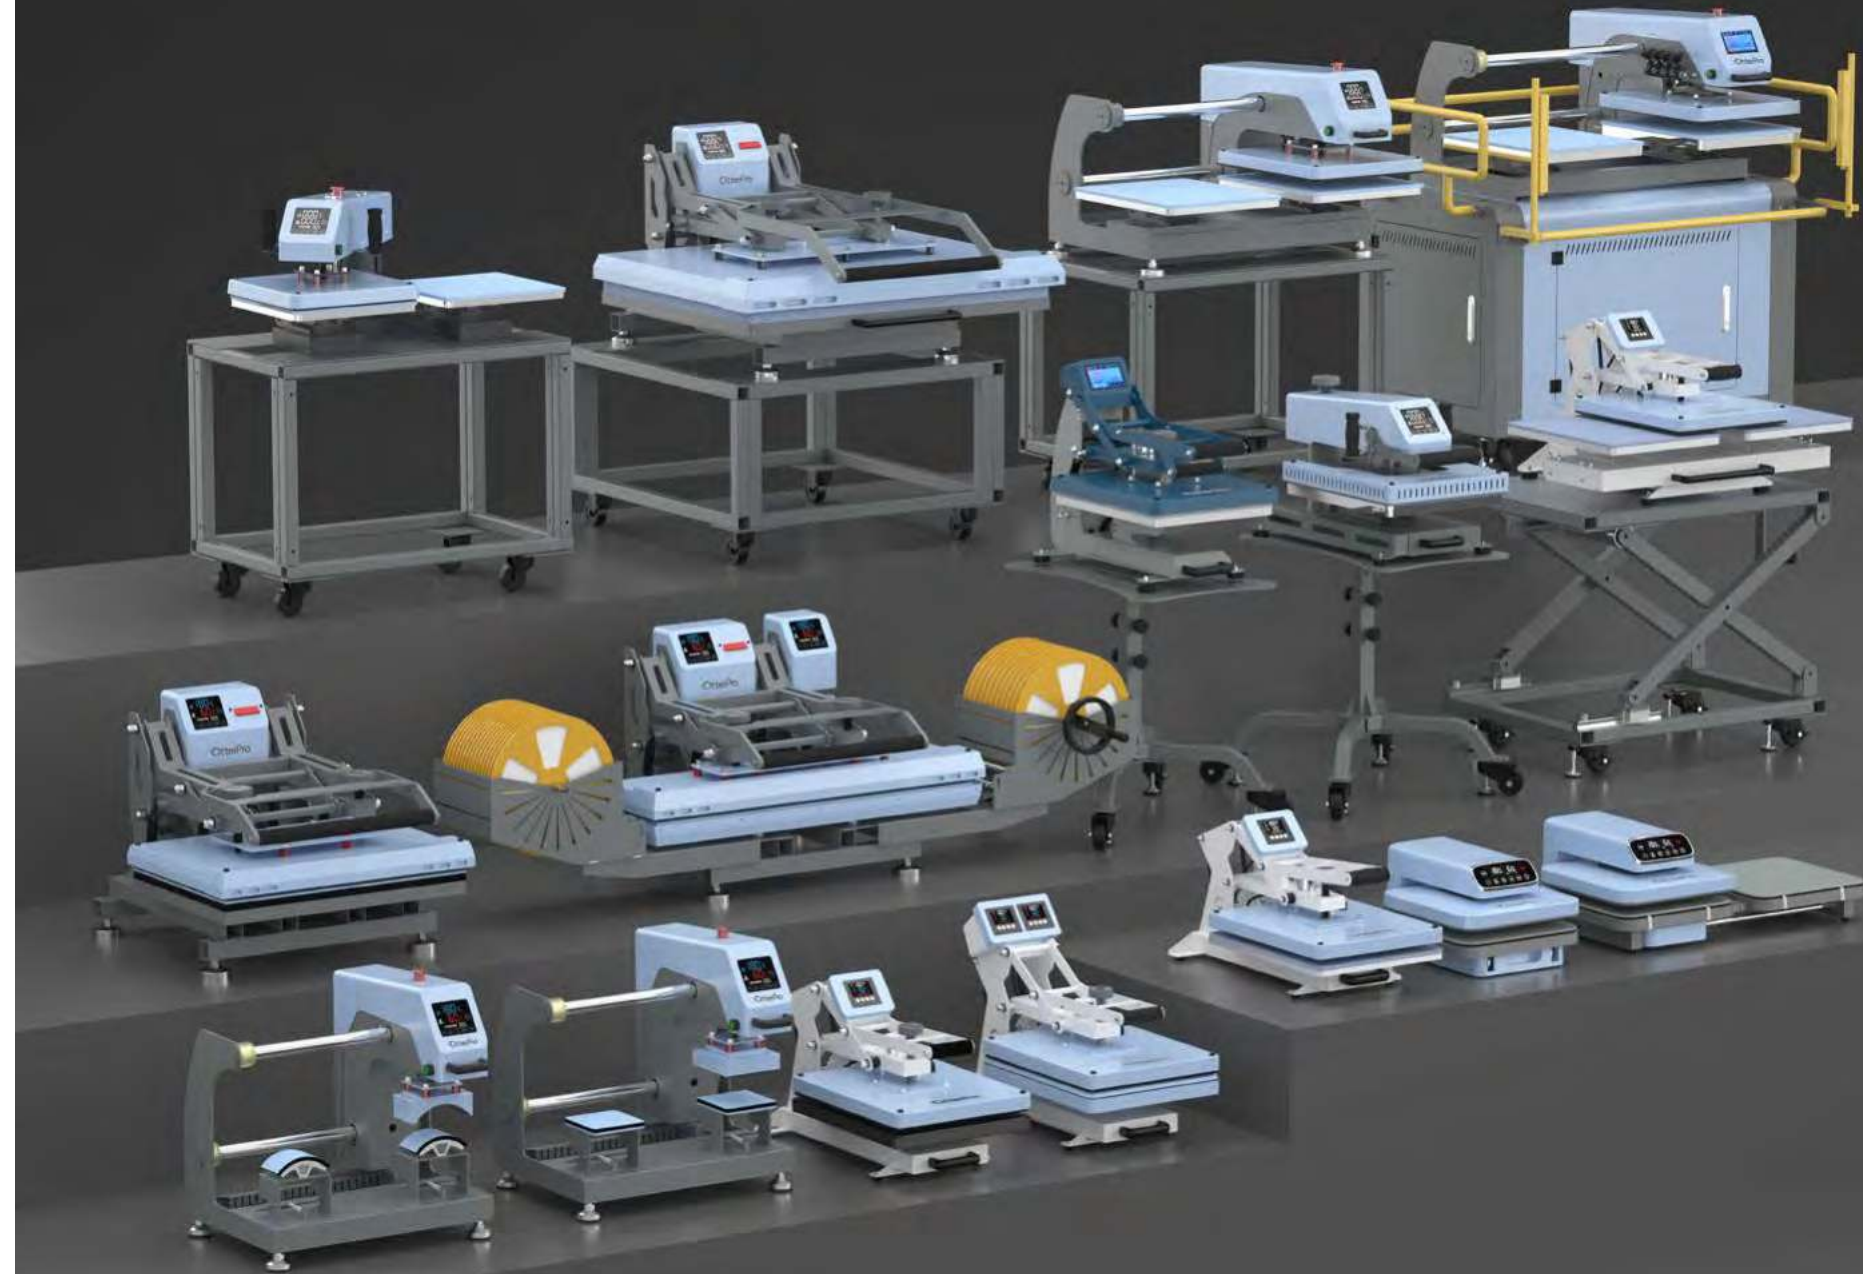



OtterUltra




## HEAT PRESS G1

STEP INTO THE SMART ERA

Revolutionize Your Work with  
Next-Gen Heat Press



### ALL-AROUND UPGRADE

-  Touch Screen Panel
-  Customizable User-Friendly System
-  Superior Hardware




## Smart System

-  Smart Control Panel
-  On-Screen Keyboard
-  Real-Time Pressure Level
-  Temp & Humidity Display
-  Multi-User Management
-  Daily Output Records
-  Self-Diagnostic Program
-  Replaceable Wallpaper
-  7 Languages Supported
-  Save Custom Parameters & Materials
-  User Guide
-  Data Migration (Stay Tuned)

# Superior Hardware


## Thicker Heating Platen

An upgraded, thicker heating platen ensures superior heat retention and even heat distribution.

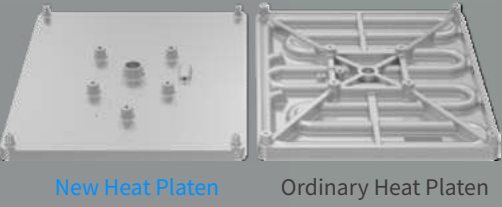


## Reinforced Base Platen

Built with a wider and stronger structure for exceptional flatness and consistent heating performance.

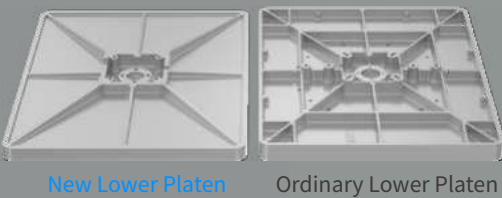

# Safety System

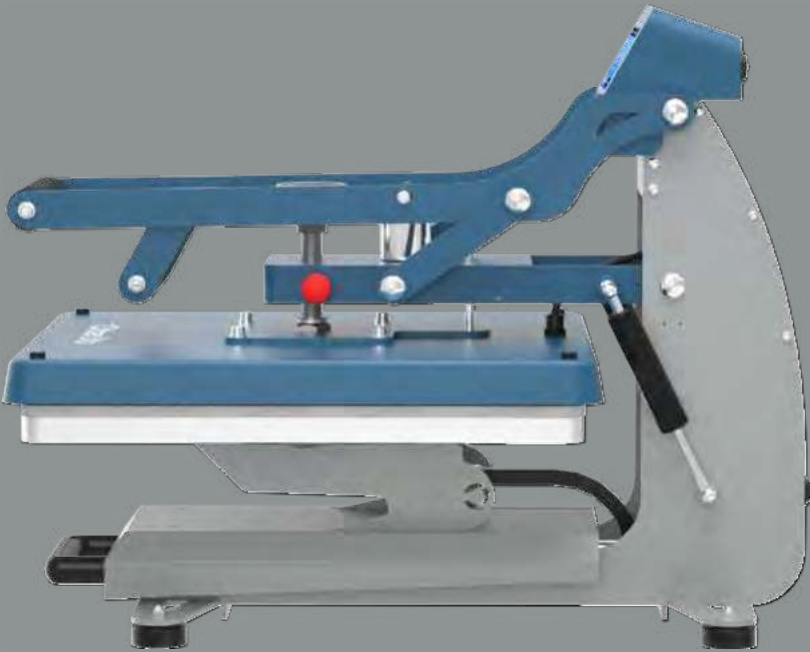

- High-Voltage Test Before Leaving the Factory**
- Solid-State Relay**  
Safe and stable operation
- Emergency Stop Switch**  
Lifts the heating platen immediately in case of emergencies
- 12V Low-Voltage Electromagnet**  
Enhanced safety
- Self-Diagnostic Program**  
Quickly identifies faulty components
- Overload Protector**  
Prevents short circuits
- Platinum RTD Temperature Control**  
More sensitive and precise
- Automatic Heat Control Mechanism**  
Protects the machine from excessive heat
- Auto-Sleep Mode**  
Automatically stops heating after one hour of inactivity

**5" Touch Screen**  
High-resolution display for precise control and easy operation.

**7-Level Pressure Scale Display**  
Equipped with a load cell for accurate pressure application, ensuring consistent results and minimizing errors.

**Premium Guide Rail**  
Slide out the lower platen with ease for extra prep space—no more scalding!

**Premium Gas Strut**  
It helps to enhance the safety and stability and deliver even pressure distribution onto the substrates.

**Protective Cover**  
Designed to maintain a lower surface temperature, effectively preventing accidental burns and ensuring safer operation.

Item No.	OU-G14050MB	Time Range	0-999 seconds	Dimension	74.8*43.14*56.9cm/ 29.4*16.9*22.4in
Heat Platen	40x50cm / 16x20in	Pressure Level	Level 0-7	Warranty	Framework - 2 Years Heating Platen - 10 Years Circuit Board - 3 Years
Power	1750W MAX -3%	Net Weight	56.7 KG / 125 lb		
Voltage	240V / 120V 50~60Hz	Temp. Range	0-220°C (32-428 °F )		



#### Assist Handle

Ergonomic grip ensures stability and safer handling.



#### U-Shaped Design

It allows you to thread your garment onto the platen easily.



#### Platen Cover

Heat-Resistant cover protects the mat and extends durability.




#### Temp. & Humidity Display

Monitors conditions for optimal heat press performance.



#### Type-C Port

Provides convenient power for small electronic devices.

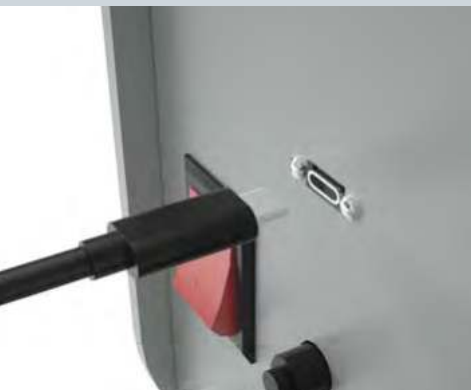


#### USB Support

Enables fast data exchange and easy file access.



#### Internal Speaker

Plays music or videos for an enhanced user experience. (Stay Tuned)

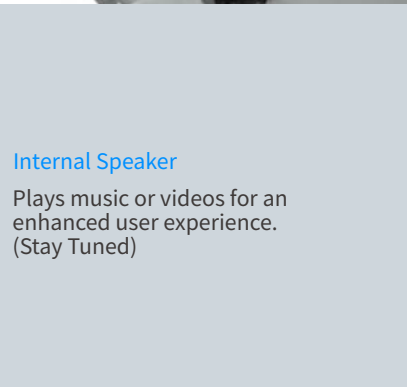


#### Detachable Control Box

Removable control panel allows flexible adjustments.



## WIDE APPLICATION

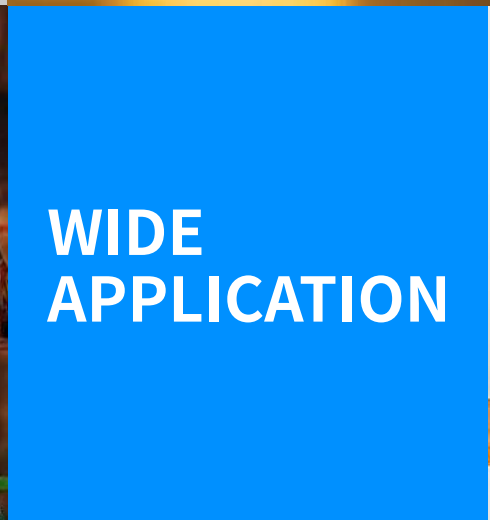



# Clamshell Heat Press

Specially designed for DTF printing! Unlike the previous horizontal version, this 40x50cm/16x20inch vertical heating platen design is more suitable for garment printing. The uniformly heating platen ensures exceptional printing results every time, making it an excellent choice for a DTF heat transfer!



Premium Heating Element

Vertical Heating Platen

The Heat Press features an even heating platen board, which is essential for ensuring consistent results when heat transfers onto your substrates.

Ideal for T-shirt printing

Item No.	OT-PB3838MDLB	OT-PB4050SMDLB	OT-PB4060MDLB
Heat Platen	38x38cm / 15x15in	40x50cm / 16x20in	40x60cm / 16x24in
Power	2000W /1300W MAX±5%	2200W /1600W MAX±5%	2400W /1800W MAX±5%
Voltage	220V / 110V    50~60Hz		
Temp. Range	0-250°C (0-482 °F )		
Time Range	0-999 seconds		



### Optional Configurations

- Manual

✗ Slide-Out Drawer  
✗ Auto-Open
- Drawer

✓ Slide-Out Drawer  
✗ Auto-Open
- Auto-Open

✓ Slide-Out Drawer  
✓ Auto-Open

# Semi-Automatic Double Station Heat Press Machine

Double the efficiency of your DTF heat transfer projects with our dual-station design. Now, you can do the prep work while printing, saving both time and effort!



- High Efficiency

Dual Station  
Smooth Sliding Design
- Safety

Overload Protection  
Overheat Protection  
Protective Relay
- Premium Construction


Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging
- Convenient

Ease of Use  
Ideal for T-shirt Printing

Item No.	OT-DSPB4050LB
Heat Platen	40x50cm / 16x20in
Power	2200W /1600W    MAX±5%
Voltage	220V / 110V    50~60Hz
Temp. Range	0-250°C (0-482 °F )
Time Range	0-999 seconds



Smooth Sliding Design

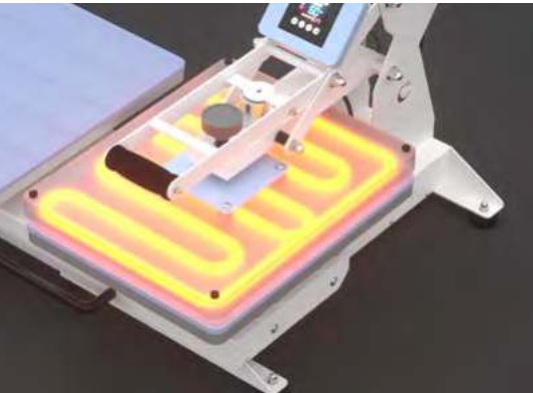

Premium Heating Element





**Lower Platen with Drainage Holes**  
Easy drainage and storage

Item No.	OT-PBD4050
Heat Platen	40x50cm / 16x20in
Power	2200W /1600W    MAX±5%
Voltage	220V / 110V    50~60Hz
Temp. Range	0-250°C (0-482 °F )
Time Range	0-999 seconds



**Premium Construction**  
Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging



**Safety**  
Built-in Cooling System  
Overload Protection  
Overheat Protection  
Protective Relay



**Vertical Heating Platen**  
Ideal for T-shirt printing



**Dual Temp. Control, Dual-sided Heating**

Item No.	OT-PBS4050	
Heat Platen	40x50cm / 16x20in	
Voltage	220V, 50~60Hz	110V, 60Hz
Power(MAX±5%)	4400W	3200W
Max. Input Current	20A	30A
Temp. Range	0-250°C (0-482 °F )	
Time Range	0-999 seconds	



**Premium Construction**  
Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging



**Safety**  
Built-in Cooling System  
Overload Protection  
Overheat Protection  
Protective Relay



**Vertical Heating Platen**  
Ideal for T-shirt printing

# Autopress Max Heat Press



Single Platen

Dual Platen

Item No.	<a href="#">OT-AUPB3838FLB</a> <a href="#">OT-DAUPB3838LB</a> (Dual Station)
Power	1200W
Voltage	230V/120V 50~60Hz
Temp. Range	40-205° C(104-401° F)
Time Range	1-999 seconds
Printable Articles Max	38x38cm / 15x15in



## One Touch Mode

Just touch to repeat! Batch personalization has never been simpler with a single touch.



## Smooth Sliding Design

The guide rail design helps to enhance workflow efficiency and ensure a smooth and unobstructed movement.



## Retracting Drawer

Effortless and elegant handle design that saves space; the retracting drawer offers you more room for easy prep work.



## Intelligent Pressure

For substrates up to 2 cm thick, perfectly consistent pressure every time, with no guesswork.



## Premium Heating Element

Redesigned for unmatched efficiency and even heating with 15"x 15" heating platen.



## Unmatched Clarity and Convenience

Discover the ease of an expanded screen for effortless navigation, visualization, and settings adjustment. Create more with a timer that extends up to 8 minutes for larger projects.



## Go Handleless

It's designed with an integrated handle, giving it a compact and more streamlined look.




# Lanyard Heat Press


Designed specifically for lanyard personalization, this heat press series features an extra-wide heating platen—perfect for full-wrap, full-color printing on lanyards, ribbons, shoelaces, and more. Ideal for branding, trade shows, events, schools, and promotional products.




**OT-PBAS25100DLB**  
Dual heating with feeding device for faster, consistent results on both sides.



Lanyard Feeding Device



Double-sided Printable



Designed for Lanyard

Heating Platen: 100 x 25 cm /39.3 x 9.8 in  
Dimension: 204 x 84 x 63 cm / 80.3 x 33 x 24.8 in






Designed for Lanyard

**OT-PBA25100DLB**  
Compact and efficient entry-level model for basic lanyard printing needs.  
Heating Platen: 100 x 25 cm /39.3 x 9.8 in  
Dimension: 105 x 80 x 63 cm / 41.3 x 31.4 x 24.8 in


Size	Power	Voltage	Max. Input Current
25x100cm / 9.8x39.3in	2400W	220V/Single Phase	10.91A
25x100cm / 9.8x39.3in (Upper & Lower Heat)	4800W	220V/Single Phase	21.82A
Frequency: 50Hz      Temp. Range: 0-250°C (32-482 °F )      Time Range: 1-999 seconds			



**OT-PBAD25100DLB**  
Enhanced with a feeding device to streamline workflow and reduce handling time.



Lanyard Feeding Device



Designed for Lanyard


Heating Platen: 100 x 25 cm /39.3 x 9.8 in  
Dimension: 204 x 84 x 63 cm / 80.3 x 33 x 24.8 in



## Double-sided Printable

Featuring upper and lower platen, you can achieve double-sided printing effect at once.


Optional Configurations

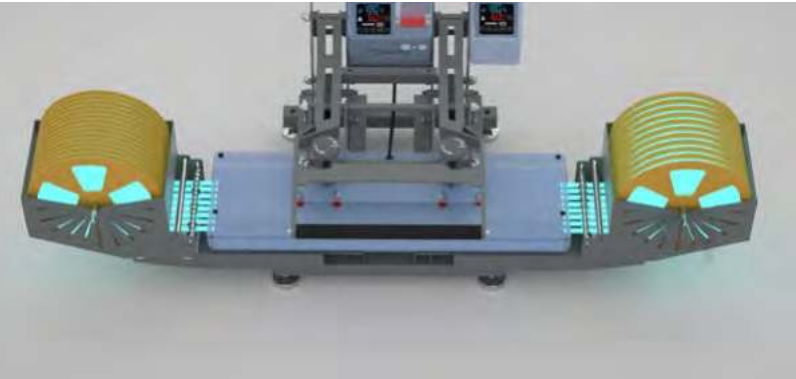

## Highly Efficient Feeding Device


The all-in-one heat press combines feeding and winding, allowing you to print multiple lanyards simultaneously. Its even heating design boosts productivity and efficiency for all your projects.

Optional Configurations

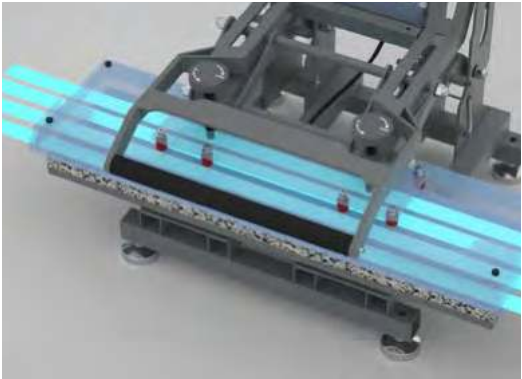

## Designed for Lanyard

The large-format design delivers high-efficiency personalization for lanyards, accommodating most standard sizes on the market.

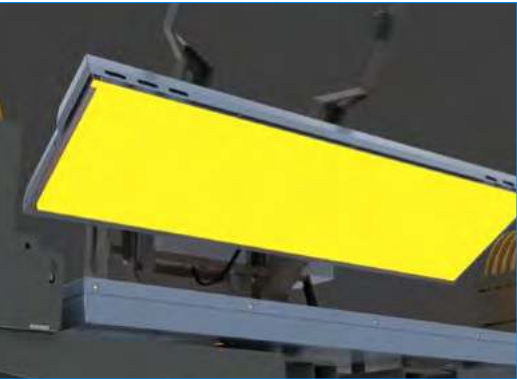

## Even Heating

Premium heating element for flawless results every time.



## User-friendly Touch-screen

Designed with a large touch-screen design for precise temperature control.



# Large Format Heat Press

Large & Multiple Small Items in One Go! 5 sizes available for different printing needs. Whether you're in textile printing, gift personalization, or home décor, our oversized heat press lets you print dozens of small items at once or create full-bleed designs on large format fabrics. It improves your efficiency and works perfectly across a variety of substrates!



OT-PB80100DLB  
Heating Platen:  
80x100cm / 31.5x39.4in  
With Drawer



OT-PB6080DLB  
Heating Platen:  
60x80cm / 23.6x31.5in  
Optional Version: With/Without Drawer




OT-PBB4080DLB  
Heating Platen:  
40x80cm / 15.7x31.5in  
Optional Version: With/Without Drawer



OT-PBD5070DLB  
Heating Platen:  
50x70cm / 19.6x27.5in  
Optional Version: With/Without Drawer




OT-PBC5060DLB  
Heating Platen:  
50x60cm / 19.6x23.6in  
Optional Version: With/Without Drawer



**High Efficiency**

Oversized Heat Press



**Safety**

Overload Protection  
Overheat Protection  
Protective Relay



**Premium Construction**


Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging



**Convenient**

Ease of Use  
Multiple Voltage Optional

Size	Power	Voltage	Max. Input Current
40x80cm / 15.7x31.5in	3600W	220V/ Single Phase	16.36A
50x60cm / 19.6x23.6in	4500W	220V/ Single Phase	20.45A
50x70cm / 19.6x27.5in	5400W	380V/ Three Phase	8.18A
		220V/ Three Phase	14.19A
		220V/ Two Phase	24.55A
		220V/ Single Phase	
60x80cm / 23.6x31.5in	6000W	380V/ Three Phase	9.12A
		220V/ Three Phase	15.76A
	4500W	220V/ Two Phase	20A
		220V/ Single Phase	
80x100cm / 31.5x39.4in	6600W	380V/ Three Phase	10A
		220V/ Three Phase	17.3A
		220V/ Two Phase	30A
		220V/ Single Phase	
Frequency	50Hz		
Temp. Range	0-250°C (32-482 °F )		
Time Range	1-999 seconds		

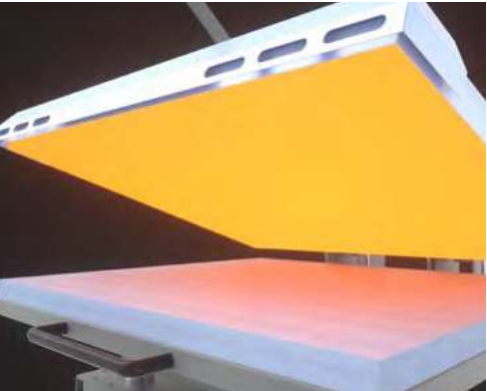


## Premium Heating Element

The Heat Press features an evenly heating platen board, which is essential for ensuring consistent results when heat transfers onto your substrates.



## Oversized Heating Platen

It has an oversized heating platen, suitable for making full printing on large creations, like towels, blankets, tablecloths, pants, banners and more.

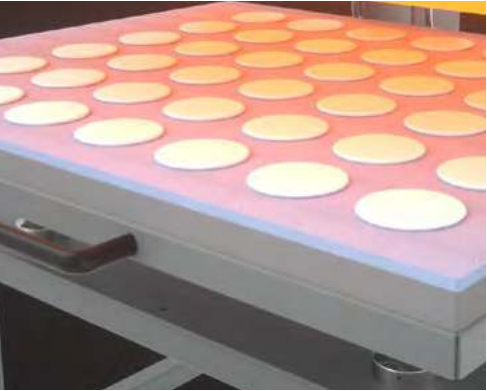

## High Efficiency

Unlike a small-format heat press, this heat press can print dozens of photo frames, ornaments, and even 4 t-shirts at the same time, significantly enhancing heat transfer efficiency.



## User-friendly Touch-screen

Designed with a large touch-screen design for precise temperature control.



# Swing Away Heat Press

Swing away to place, swing back to press! This design helps you avoid scalding and injuries during prep work. With its high-pressure eccentric bearing, you can achieve even heat distribution across your substrates for flawless results every time!



### Premium Construction

Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging



### Safety


Built-in Cooling System  
Overload Protection  
Overheat Protection  
Protective Relay



### Convenient

Ease of Use  
Touch-screen Design  
Ideal for T-shirt Printing

Item No.	OT-YT4050LB	Voltage	220V / 110V 50~60Hz
Heat Platen	40x50cm/16x20in	Temp. Range	0-250°C (32-482 °F )
Power	2200W /1600W MAX±5%	Time Range	0-999 seconds

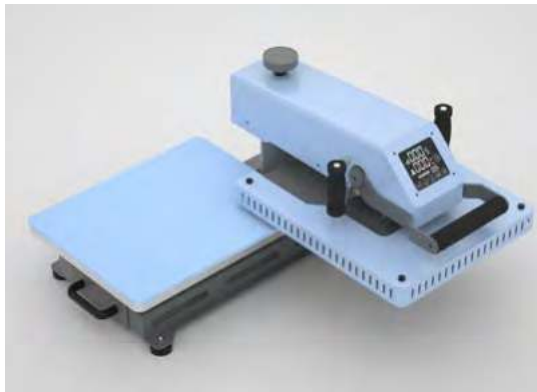

Swing-away Design



Premium Heating Element



High Pressure Eccentric Bearing

# Air Press Dual Station Swing-away Heat Press

This air-operated heat press uses air pressure to apply consistent, uniform heat and pressure to your substrates. With its swing-away and double-station designs, you can prepare your next project while one is being printed, saving you time and effort!



### High Efficiency

Dual Station  
Swing-away Design  
Air-operated  
Auto Press & Release



### Safety

Built-in Cooling System  
Overload Protection  
Emergency Stop  
Overheat Protection  
Protective Relay  
Dual Buttons for Safer Operation



### Premium Construction

Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging




### Convenient

Ease of Use  
Touch-screen Design  
Ideal for T-shirt Printing


Item No.	Heat Platen	Power(MAX±5%)/ Voltage	Frequency	Temp. Range	Time Range
OT-DQSPBY3838LB	38x38cm 15x15in	2000W / 220V 1300W / 110V	50~60Hz	0-250°C 32-482 °F	0-999 s
OT-DQSPBY4050LB	40x50cm 16x20in	2200W / 220V 1600W / 110V			



Swing-away Design

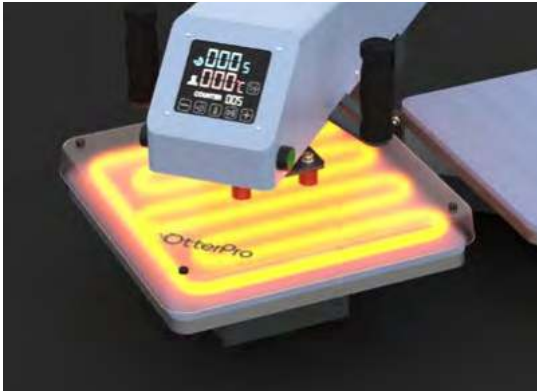

Premium Heating Element

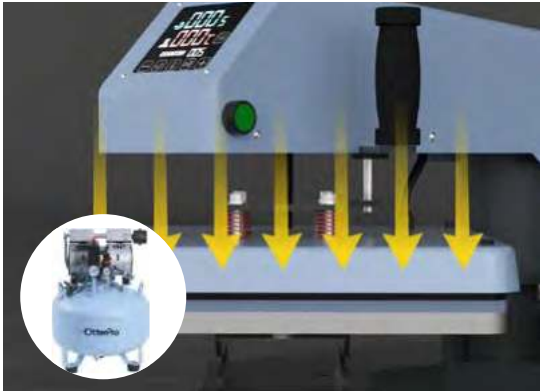

Automatic Pneumatic System

# Air Press Slide Dual Station Combo Heat Press

Powered by an air compressor, this pneumatic heat press combines a compact, dual-station design with double the efficiency and productivity. It delivers even heat and pressure for flawless results—achieving a 99% success rate with our air-operated series! The heating attachment is replaceable, combines a heat press to suit your need.



Double Station Label Maker  
OT-QSHYB1515LB



Double Station Cap Press  
OT-QSHCPLB



High Efficiency

Dual Station  
Smooth Sliding Design  
Air-operated  
Auto Press & Release



Safety

Built-in Cooling System  
Overload protection  
Emergency Stop  
Overheat Protection  
Protective Relay  
Dual Buttons for Safer Operation



Premium Construction

Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging




Convenient


Ease of Use  
Touch-screen Design  
Ideal for T-shirt Printing



Smooth Sliding Design

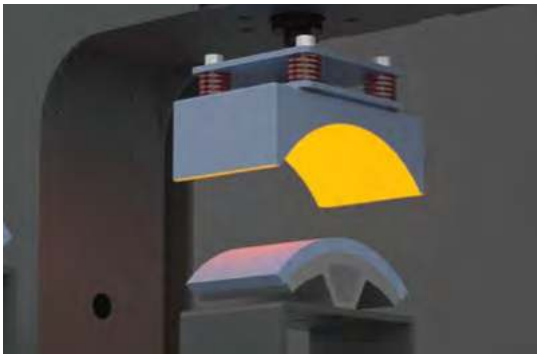

Premium Heating Element

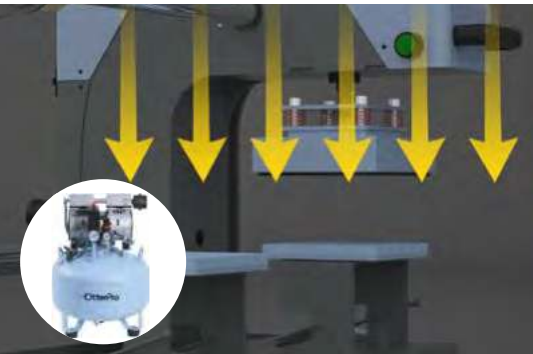

Automatic Pneumatic System

Power	Voltage	Temp. Range	Time Range
550W MAX±5%	220V / 110V 50~60Hz	0-250°C (32-482 °F )	0-999 seconds

# Air Press Slide Dual Station Flat Heat Press

Maximize your heat transfer productivity and efficiency with this air-operated heat press! Slide, press, and repeat—batch personalization has never been easier!



High Efficiency

Dual Station  
Smooth Sliding Design  
Air-operated  
Auto Press & Release



Safety

Built-in Cooling System  
Overload protection  
Emergency Stop  
Overheat Protection  
Protective Relay  
Dual Buttons for Safer Operation



Premium Construction


Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging



Convenient

Ease of Use  
Touch-screen Design  
Ideal for T-shirt Printing


Item No.	OT-QSH4050LB	Voltage	220V / 110V 50~60Hz
Heat Platen	40x50cm / 16x20in	Temp. Range	0-250°C (32-482 °F )
Power	2200W /1600W MAX±5%	Time Range	0-999 seconds

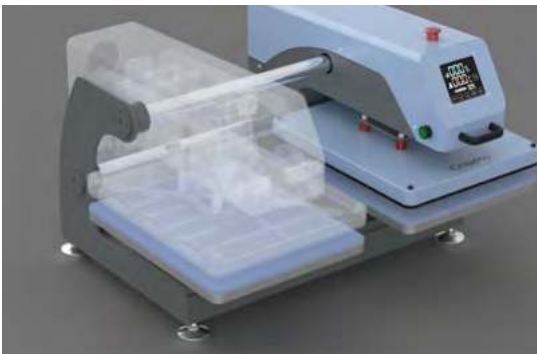

Smooth Sliding Design



Premium Heating Element

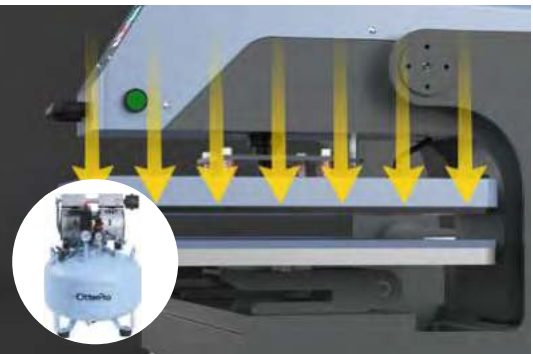

Automatic Pneumatic System



# Air Press Slide Pro Dual Station Heat Press



Bring intelligence and automation to industrial production! With automatic printing and movement design, this heat press is designed to simplify complex tasks and eliminate hassle. Equipped with precision infrared positioning, it delivers professional-grade quality while handling high-volume production with ease.

Item No.	OT-AUQSH4050LB	Heat Platen	40x50cm / 16x20in
Voltage	220V / 110V 50~60Hz	Temp. Range	0-250°C (32-482 °F )
Power	2200W /1600W MAX±5%	Time Range	0-999 seconds



### Smart System

1. Smart Control Panel

2. 7 Languages Supported

3. Save Custom Parameters & Materials
4. Self-Diagnostic Program

5. Multi-User Management

6. Daily Output Records

7. Temp & Humidity Display



### High Efficiency

Dual Station  
Fully Automatic Print Mode  
Air-operated  
Auto Press & Release



### Safety

Built-in Cooling System  
Overload protection  
Emergency Stop  
Overheat Protection  
Protective Relay  
Dual Buttons for Safer Operation  
Safety Light Curtains




### Premium Construction

Aluminium Die Casting  
Quick Heat-Up  
Even Heating  
Precision Cut Forging



### Convenient

Ease of Use  
Smart Touch Screen  
Ideal for T-shirt Printing

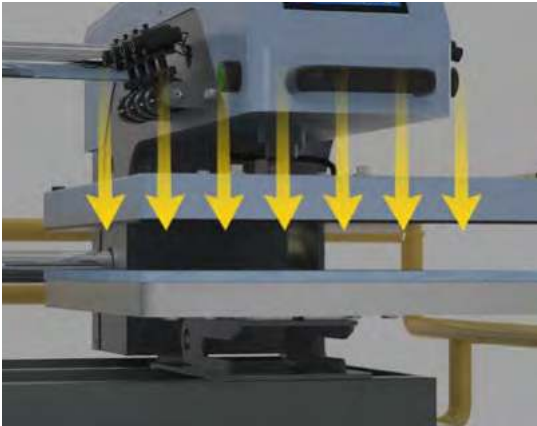


### Automatic Pneumatic System

It delivers consistent, uniform heat and pressure to your substrates.




### Built-in Air Compressor

The built-in design saves space, delivers a sleek and tidy look, and enhances safety for users.

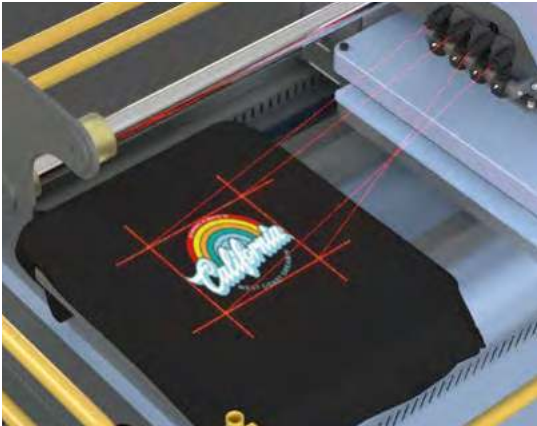


### Precision Infrared Positioning

With its infrared positioning, this system ensures a precise placement of your design.

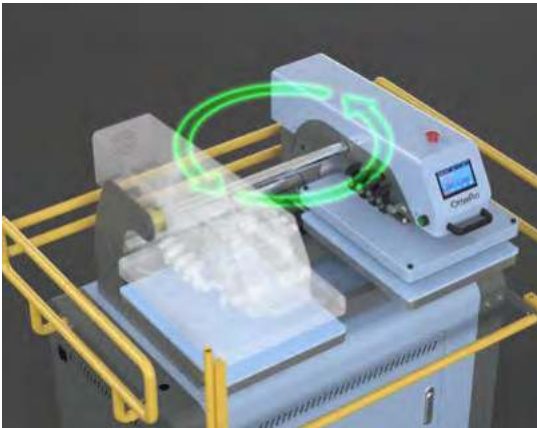

### Fully Automatic Mode

Automatically sliding and printing, easily achieving batch printing.

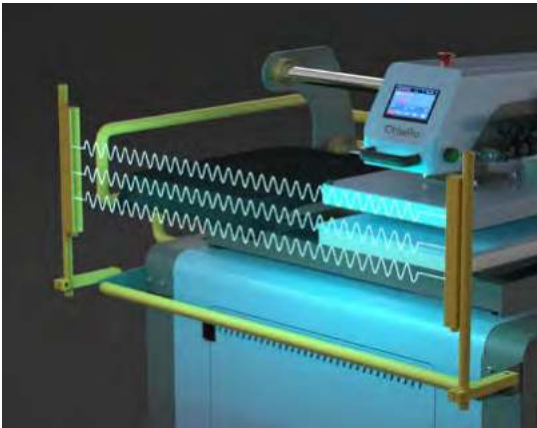

### Safety Light Curtain

It uses a series of infrared beams to form an invisible barrier around the heat press, ensuring user safety by preventing accidents during operation.



### Easy to Move

Equipped with 4 swivel casters, this machine can be effortlessly moved anywhere, even by a single person.

# Single Station Heat Press Stand

BHPP-D



# Dual Station Lift Heat Press Stand

BHPP-S



# Air Compressor 30L

Item No.	OT-KYJ30LB
Capacity	30L
Power	550W
Voltage	220V / 110V 50~60Hz
Max. Pressure	0.8mpa
Air Flow Capacity	100L/min



# OtterPro Ink Shaker

Skip the manual shaking! It helps evenly shake DTF ink to avoid precipitation and gives your printheads a longer service life.



Item No.	OT-YMQLB
Power	3.6 W
Voltage	110V-220V 50~60Hz



VISIT US

for new releases and tutorials on our website.

WWW.OTTERDTF.COM

FOLLOW US FOR THE LATEST UPDATES!

